

UNCLASSIFIED

---

AD 274 655

*Reproduced  
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
ARLINGTON HALL STATION  
ARLINGTON 12, VIRGINIA



---

UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

**BEST**

**AVAILABLE**

**COPY**

274655

# ENGINEERING TECHNICAL REPORT

NOX

CATALOGED BY ASTIA  
AS AD NO.

THE LOAD CARRYING CAPACITY AND STABILITY  
OF HYBRID GAS BEARINGS

by

L. W. Winn  
B. Sternlicht

R62AT8

March 11, 1962

62-3-2

AIRCRAFT ACCESSORY TURBINE DEPARTMENT

GENERAL  ELECTRIC

APPLIED MECHANICS AND SYSTEMS ANALYSIS LABORATORY

THE LOAD CARRYING CAPACITY AND STABILITY  
OF HYBRID GAS BEARINGS

by

L. W. Winn  
B. Sternlicht\*

MARCH 11, 1962

TECHNICAL REPORT R62AT8

FOR: Office of Naval Research  
CONTRACT NO.: NONR 2844(00)  
TASK NO.: NR097-348

\*Presently associated with  
Mechanical Technology Incorporated  
Latham, New York

DISTRIBUTION

Complete Report:

AATD Library, 3-74  
SAE Library, 2-40  
FPD Library, Evendale  
TIS, Bldg. 5, Schenectady

Schenectady, New York  
RC Elwell, 37-323  
GR Fox, 37-1020  
LE St. Pierre, 4A16, Res. Lab.  
JD McHugh, 37-1020  
DW Jones, 37-1020  
WR Nial, 37-304  
RM Mains, 37-680  
FJ Martin, 5A6, Res. Lab.  
GM Rentzepis, 37-680

Bridgeport, Connecticut  
CA Edman, Fan Dept.

Lynn River Works  
MA Prohl, 2-64G  
JD Cairns, 3-74  
LW Winn, 3-74 (2)

Fitchburg, Massachusetts  
AE Truran, SST

Erie, Pennsylvania  
PS Potts, DCM & G

Ft. Wayne, Indiana  
RW Dochterman, CP Div., Lab. Op.

San Jose, California  
K. Cohen, APED

Pittsfield, Massachusetts  
DF Wilcock, Ordnance

Title Page:

TIS, Bldg. 5, Schenectady

## TABLE OF CONTENTS

	<u>Page</u>
Glossary of Terms .....	iv
List of Symbols .....	v
I. INTRODUCTION .....	1
II. TEST EQUIPMENT .....	3
III. DISCUSSION OF TEST RESULTS .....	5
IV. THEORETICAL ANALYSIS .....	12
V. CONCLUSIONS .....	17
VI. REFERENCES .....	18
VII. APPENDIX	
A. List of Tables .....	19
B. List of Figures .....	22
C. Distribution List .....	49

## GLOSSARY OF TERMS

Self-acting - (Used interchangeably with hydrodynamic) - a bearing system in which the journal and bearing are separated by a fluid film resulting from pressures generated by relative displacement and motion of the surfaces.

Externally Pressurized - (Used interchangeably with hydrostatic) - a bearing system in which the journal is separated from the bearing by fluid film established due to introduction of pressurized fluid into the clearance between them.

Hybrid Bearings - A bearing system combining self acting and externally pressurized features.

Steady State Performance - A condition at which the fluid film pressure is distributed independently of time, i.e., stationary journal axis.

Dynamic Performance - A condition under which the axes of the journal moves so that local gas film pressures vary with time. Examples of dynamic operation are:

- a. Start-up and shutdown transients
- b. Motion excited by rotating load
- c. Motion excited by reciprocating load
- d. Bearing instability (H.F.W., F.F. W., and synchronous whirl as described in this paper)

Whirl Ratio - Ratio of frequency of shaft rotation to frequency of shaft whirl.



# LIST OF SYMBOLS

L/D	Length/Diameter
b	m/w
c	Radial Clearance, 1 inch
f	Bearing Load, lbs.
$I_p$	Polar Moment of Inertia, $\#/sec.^2/in.$
$I_T$	Translatory Moment of Inertia, $\#/sec.^2/in.$
$K_2$	Radial Bearing Stiffness, $\#/inch$
$K_c$	Radial Translatory Stiffness Evaluated at $\omega_c$ , $\#/inch$
$\omega$	Angular Velocity, rad./sec.
$\omega_c$	Angular Velocity at Onset of H.F.W. - Conical Whip, rad/sec.
$\omega_T$	Angular Velocity at Onset of H.F.W. - Translatory Whip, rad/sec.
$l$	Bearing Span c-c, inches
L	Bearing Length, inches
m	Mass, $\frac{\#/sec.^2}{inch}$
$P_a$	Ambient Pressure, psia
R	Bearing Radius, inches
e	Eccentricity Ratio
$\Lambda$	Compressibility Number
$\mu$	Viscosity, $\frac{\#/sec.}{in^2}$
$\omega$	Attitude Angle, degree
$K_3$	Radial Stiffness Under Misaligned Conditions
$K_s$	Static Spring Stiffener
$F_{rh}$	Radial Hydrodynamic Force
$F_{th}$	Tangential Hydrodynamic Force
e	Eccentricity - inches

## I. INTRODUCTION

The theory of externally pressurized bearings, despite valuable contributions by some investigators, is still in its initial stages of evolution. Most of the solutions presently available (Refs. 1, 2, 3, 4, page 18) disregard rotational effects and as such can only be used with fair accuracy to determine the static load carrying capacity of externally pressurized bearings. However, since shaft rotation can have serious effects on the performance of externally pressurized bearings, it must be included in any analysis if the latter is to serve as a useful and reliable tool to the designer of systems utilizing hybrid (hydrodynamic-hydrostatic) gas bearings. The effects of rotation can be divided into two categories:

1. Effect of rotation on load carrying capacity and flow.
2. Effects of rotation on dynamic performance of a rotor-bearing system.

Regarding the first category, a recent theoretical analysis which includes the effects of rotation, shows that the hydrodynamic effect may or may not have a significant influence on the hydrostatic load capacity; its effect depends upon the operating conditions (Ref. 5, page 18). Effects of rotation on the dynamic behavior of the rotor-bearing system, however, can be quite severe and plagued by various types of instabilities which have been recognized and can broadly be defined as:

1. Critical Speed

This is a rotating speed of a journal which corresponds to the resonant frequencies of the system. (The system critical speeds include rigid body as well as bending or torsional critical speeds).

2. Half-Frequency Whirl

A special case of instability generally associated with self-acting journal bearings. This instability occurs when the journal speed reaches a critical value. The journal axis whirls at a frequency of one-half or nearly one-half of the journal speed in the same direction as the journal rotation. The motion of the journal axis can be either conical or translatory.

3. Fractional-Frequency Whirl

The subject phenomenon is a special case of instability generally associated with hybrid journal bearings. This instability occurs when the journal speed reaches a critical value. The journal axis whirls at a frequency which is a fraction of the journal speed in the same direction as the journal rotation. The motion of the journal axis can be either conical or translatory. (The expression for the fractional frequency is given in equation 14, (page 15). and in the limit where self-acting forces predominate, it approaches the half-frequency whirl).

4. Pneumatic Hammer

This is a self-excited oscillation in the flow system of an externally pressurized bearing. This oscillation does not necessarily require shaft rotation.

## II. TEST EQUIPMENT

Figure 1 presents a picture of the test rig which consists of a housing incorporating two journal bearings, the length of which can be changed up to 2 inches maximum. The shaft is 2 inches in diameter and accommodates a Terry-type impulse drive turbine on one end. The turbine employs full arc admission to minimize aerodynamic forces on the rotor. A dummy wheel is mounted on the other end of the rotor to provide rotor symmetry, decrease coastdown time, serve as a speed signal generating device, and a direction of rotation reverser.

The bearings (leaded-bronze) are externally fed through a total of eight orifices per bearing with all connections extending to a common manifold for each individual bearing. The orifice holder (figure 2, page 24) includes a removable orifice insert to facilitate quick orifice changes. In addition to the replaceable orifices, fixed orifices (.052 inch) are permanently incorporated in the journal bearing. This series orifice combination provides a means for changing the feeding system from orifice compensation to a combination of orifice-inherent compensation, or pure-inherent compensation through changes in replaceable orifice diameter and clearance.

Each bearing is fed via flowmeters shown in figure 1. The two meters shown for each bearing cover a range from 0 - 1.5 scfm with accuracy ranging from 2% - 8% of measured flow. Pressure gages calibrated to indicate absolute pressure with accuracy of  $\pm .5$  psi are used to register supply pressure levels.

Loading is accomplished through an air piston connected through a flexible foil to a  $180^\circ$  recessed gas journal bearing. The piston pulls against the foil which, in turn, applies a uniform load to the shaft. Since this system permits uniform

and indirect (through air film) load application, damping applied through the loading device which may effect onsets of instability can be considered negligible. Due to instability encountered on the loader bearing above 40,000 rpm, the use of the same had to be restricted to speeds below that level. The nature of this instability was not determined; however, it should be noted for future references that the bearing was 2 inches in diameter with 0.001 inch radial clearance and a recessed depth of 0.0005 inch, with 3/16 inch wide lands running around the entire perimeter. A centrally located 0.25 inch diameter hole was used to admit external air under pressure.

Each bearing end is supplied with four capacitive probes placed  $90^\circ$  apart with the output of each fed directly through proximity meters to a cathode-ray oscilloscope (CRO). Calibration of the CRO screen with the probe input permits determination of shaft position with accuracy of  $\pm 25 \times 10^{-6}$  inches or better. The same probe outputs are also used to determine frequency of oscillation, criticals and phase relationships between both ends.

Two thrust plates externally pressurized through 0 - 0.020 inch diameter orifices, as shown in figure 3, are used to contain the rotor in the axial direction. Total axial play amounts to 0.004 inch.

The entire unit is mounted on a heavy steel table which in turn is mounted on vibration isolation pads to reduce effects of building vibrations.

### III. DISCUSSION OF TEST RESULTS

#### A. Instabilities

##### 1. Criticals

In all tests described in this report, two critical speeds were observed in the safe operating speed range of the rotor. The lower critical corresponded to the conical mode. This conical whirl persisted up to the second critical. If one is to utilize the criterion for conical criticals described in Ref. 9 (page 18) then

$$\frac{\ell^2}{2} K_c + 2K_3 = \left(\frac{\omega_c}{\omega_n}\right)^2 (I_T - n I_P)$$

and where the critical frequency occurs at frequency of one per rev.,

$$n = 1 \text{ and } \frac{\ell^2}{2} K_c + 2K_3 = \omega_c^2 (I_T - I_P) \quad (1)$$

where  $K_3$  is the radial stiffness under misaligned conditions,  $K_3$  can be evaluated by making simplifying assumptions about end effects, and by assuming that each elemental length of the bearing contributes equally to the linear stiffness. Thus:

$$K_3 = \frac{L^2}{12} K_c \quad (2)$$

The translatory critical is a function of film stiffness and can be expressed as:

$$\omega_T^2 = \frac{2K_T}{m} \quad (3)$$

Substituting (2) in (1) and combining (1) and (3), one obtains the ratio of translatory to conical criticals for a two bearing system.

$$\frac{\omega_T^2}{\omega_c^2} = \frac{12(I_T - I_P) K_T}{m(3\ell^2 + L^2) K_c} \quad (4)$$

Assuming further that  $K_T = K_C$  (i.e., the two criticals are not too far apart in speed and therefore the stiffnesses are not too different), then the ratio of criticals, knowing the translatory and polar moments of inertia, bearing span, bearing length, and mass of rotor can be easily computed from equation 4. For our case:

$$I_T = 0.612 \text{ # sec.}^2 - \text{in.}$$

$$I_P = 0.0172 \text{ # sec.}^2 - \text{in.}$$

$$m = \frac{0.0341 \text{ #-sec.}^2}{\text{in.}}$$

$$l = 6.487 \text{ in.}$$

$$L = 1 \text{ in.}$$

$$\text{and } \frac{\omega_T}{\omega_c} = 1.285$$

Table I presents the test results in terms of criticals and onset of fractional-frequency whirl for all conditions observed. The lowest critical listed in column 3 corresponds to the conical mode induced by gyroscopic rotor effects (equation 1). Column 4 lists the next critical corresponding to the translatory mode (equation 3). Column 5 gives the onset of fractional-frequency whirl. Values of criticals for  $C = 0.0005$  inch given in this table had to be calculated since the amplitude of vibration with this particular clearance was too low to permit accurate measurements. The ratio of criticals as given in column 6 varies between 1.235 - 1.65, and does not remain constant at 1.285 as calculated above and based on  $K_T = K_C$ . The variation appears to be a function of orifice size, clearance and pressure at conditions of constant load under which those tests were performed. Column 7 gives ratios of onset of fractional frequency whirl to lowest system critical.

A comparison between calculated values and test values of the conical and translatory criticals is given in Table 2. The calculated criticals are based on equation 3 where the film stiffness  $K_T$  has been obtained from test results on load carrying capacity at a given load of 6.57 lbs. per bearing. Theoretical values based upon the theoretically derived stiffness are also given. The test values obtained have then been reduced by a factor of 1.285 to yield calculated values of conical criticals. As can be seen, the correlation of calculated and test values for the translatory criticals is good. Only fair agreement exists between calculated and test values of conical criticals. This is probably due to the simplifying assumptions made in calculating the conical stiffness.

## 2. Pneumatic Hammer

The instability known as pneumatic hammer was encountered in one bearing geometry ( $L/D = .5$ ,  $D = 2.00$  inches,  $P_g = 120$  psia,  $C = 0.001$  inch,  $a = 0.0055$  inch). The instability was severe enough to prevent safe operation. Further investigation of this phenomenon at  $P_g = 150$  and zero RPM showed that air hammer persisted up to loads of 4.5 lbs. per bearing and at higher loads it disappeared. When unstable, vibrations occurred in line with load only (vertical plane) at a frequency of 249 cps and were sinusoidal in form. At 200 psia vibrations persisted up to bearing loads of 12 lbs. per bearing, again sinusoidal, and in the vertical plane only at a frequency of 269 cps.

Pneumatic hammer investigation was not included in the scope of this program; however, pneumatic hammer appears to be a function of bearing geometry, supply pressure and bearing load. The frequency of oscillation seems to be unaffected by load, and affected by supply pressure only for a constant bearing geometry.



### 3. Fractional-Frequency Whirl

The results obtained in this series of tests on onset of fractional frequency whirl are presented in figures 4 - 9. Figures 4 - 6 show the effect of orifice size on onset of fractional-frequency whirl at various pressures keeping all other factors constant. The variation in orifice size is accomplished through orifice insert change only, leaving the 0.052 inch diameter bearing orifices in the system. This results in inherent rather than orifice compensation and, as such, has to be taken into consideration when analysis is made for comparison with test data. For the conditions represented in figure 4, the orifice size appears to have little or no effect on the onset of fractional-frequency whirl. This is due to the fact that the major restriction with the tight clearance is formed not by the area of the orifice incorporated in the insert, but by the annular area of the permanent set of 0.052 inch diameter orifices in the bearings, or combinations of both restrictors in series. It is also interesting to note that in every instance the onset of fractional-frequency whirl at zero supply pressure occurred at a higher speed than at 50 psia supply pressure. This clearly indicates that in many externally pressurized gas bearing applications, the hydrodynamic effects are significant, and must be included in stability analysis.

Results given in figures 4 - 6 are replotted in figures 7 - 9 as functions of clearance. At low supply pressure, where the hydrodynamic effects predominate, the onset of fractional-frequency whirl increases with increase in clearance. This should not be generalized since the authors in their past work (Ref. 7, page 18) have shown that a clearance exists for each bearing geometry which will produce the onset of instability at lowest speed. Either an increase or decrease in clearance from this

value will produce an increase in threshold of instability. Orifices in the bearing can also significantly influence the threshold of instability. The hydrodynamic effects for the low and high supply pressure conditions are shown in figure 10. Each graduation on the CRO screen represents 0.0001 inch, and the center of the screen represents bearing center. The shaft center is represented by the whirl paths. As can be seen with the bearing geometry indicated, when externally pressurized with 50 psia, the shaft rests on the bearing, and not enough load carrying capacity is available to lift the 6.57 lbs. per bearing load. As soon as shaft begins to spin, however, the shaft center follows a hydrodynamic path. On the other hand, with pressures of 100 psia and above, the position of the shaft when rotating does not differ appreciably from its static position. The whirl amplitudes at speeds below the lowest critical are caused by slight amounts of unbalance. The whirl amplitudes at higher speeds accompanied by phase changes indicate that the rotor is going through critical. This is shown more clearly in figure 11 where pictures show the rotor unit went through both criticals. The photo taken at the highest speed indicates onset of fractional frequency whirl. The frequencies of rotor oscillation at this onset could not be determined since in most cases the onset was quick and violent. Efforts to determine the onset of instability at high speed and high supply pressure conditions resulted in three bearing seizures.

#### 4. Effects of Load on Onset of Fractional-Frequency Whirl

The evaluation of effects of load on onset of fractional-frequency whirl had to be limited to a few points due to the fact that onset was violent

and destructive. Again, as in the other tests, a dependence upon the relative influence of hydrodynamic and hydrostatic effects can be seen in figure 12. At low pressure conditions where the hydrodynamic effects are predominant, the effect of increasing load is to increase the speed at which fractional-frequency whirl occurs. At high pressure, however, this effect becomes modified due to the increase in the load carrying capacity of the bearing. Figure 13 represents effects of load on onset of fractional-frequency whirl at constant pressures of 50 psia as a function of orifice size. Again at these low pressures, hydrodynamic effects predominate and one cannot expect to obtain appreciable benefits from archange in the size of the feeding restrictor.

### 5. Load Carrying Capacity

Results on load carrying capacity tests are presented in figures 14 - 21 where the test data is superimposed on analytical results. Correlation between theory and test results is good for radial clearances of 0.001 inch and 0.0015 inch up to eccentricity ratios of roughly 0.5. Above those ratios the slope of the load vs. displacement curves seems to be decreasing for the 0.001 inch radial clearance, the decrease being more pronounced at lower pressures. For the 0.0015 inch clearance at pressures of 100 psi and above, the slope seems to be increasing at higher eccentricities over a considerable displacement range and decreasing again as the eccentricity approaches the radial clearance. The reasons for this are not apparent at this time. Considerable disagreement between theory and test data appears in the tests involving 0.0005 inch radial clearance. This can be explained by the fact that the coefficient of discharge for the bearing in theoretical analysis was matched for one clearance ( $c=0.001$  inch)

and thereafter used for all clearance theoretically calculated.

#### 6. Flow Measurements

Results of flow measurements for all conditions are given in figures 22 - 24. As expected, the flow is dependent upon pressure, clearance and orifice size. The effects of inherent compensation are clearly shown in figures 22 and 23 where changes from  $a = 0.010$  inch to  $a = 0.015$  inch do not result in appreciable flow changes. Excellent agreement between theory (as indicated by dotted lines) and experiment is indicated for radial clearances of 0.0005 and 0.001 inch. Appreciable discrepancies reaching a maximum of 80% at the highest pressure (200 psia) are indicated for the radial clearance of 0.0015 inch. This again can be explained by the fact that the discharge coefficient in the theoretical analysis was matched for the clearance of 0.001 inch and used for all other clearances.

The effects of rotor speed on flow are shown in figures 25 and 26. The decrease in flow with speed is more pronounced at higher pressure levels than at the lower levels.

The relative comparison between discrepancies in flow and load carrying capacity results show that in both cases good agreement exists at the clearance value of 0.001 inch as expected since the discharge coefficient was matched for this particular clearance. At the minimum and maximum clearance, however, the discrepancies between experiment and theory are most pronounced for the load carrying capacity at clearances of 0.0005 inch and for flow at 0.0015 inch. This observation warrants a closer scrutiny of the variation of discharge coefficient as a function of change in feeder parameter and clearance.

#### IV. THEORETICAL ANALYSIS

The theoretical calculations are concerned with the load carrying capacity and the gas flow for the purely hydrostatic bearing. The onset of instability due to rotation will not be analyzed. The present theoretical results are based on the analysis presented in Reference 10. However, this analysis is limited to orifice restricted bearings and does not take into account the additional flow restriction caused by "inherent compensation" (i.e., the restriction due to the annular area between the rim of the feeding hole and the surface of the journal). For the present test bearing, the feeding hole diameter is sufficiently small to make this effect very important, even being dominant for the tests with the largest orifice size. Thus, it is necessary to incorporate the inherent compensation in the analysis of Reference 10. The journal bearing is pressure-fed from orifice restricted feeding holes on the circumference in the centerplane of the bearing. For a sufficiently large number of feeding holes, these may be approximated by a line source such that the gas feeding becomes a boundary condition to the differential equation describing the flow in the bearing. The differential equation is Reynolds equation which for a perfect gas under isothermal conditions may be written:

$$\frac{\partial}{\partial x} [\bar{P} \bar{h}^3 \frac{\partial \bar{P}}{\partial x}] + \frac{\partial}{\partial z} [\bar{P} \bar{h}^3 \frac{\partial \bar{P}}{\partial z}] = 0 \quad (1)$$

( $\bar{P}$  = pressure, psia -  $\bar{h}$  = film thickness, inch -  $x$  = circumferential coordinate, inch -  $z$  = axial coordinate, inch).

To make dimensionless set:

$$\theta = \frac{x}{R} \quad \xi = \frac{z}{R} \quad P = \frac{\bar{P}}{P_a} \quad h = \frac{\bar{h}}{C} = 1 + \epsilon \cos \theta$$

( $R$  = bearing radius, inch -  $C$  = radial bearing clearance, inch -  $P_a$  = ambient pressure, psia -  $\epsilon$  = eccentricity ratio).

Then:

$$\frac{\partial}{\partial \theta} [P h^3 \frac{\partial P}{\partial \theta}] + \frac{\partial}{\partial \xi} [P h^3 \frac{\partial P}{\partial \xi}] = 0 \quad (2)$$

Writing the pressure as a power series of the eccentricity ratio  $\epsilon$  :

$$P = P_0 + \epsilon P_1 + \epsilon^2 P_2 + \dots \quad (3)$$

and substituting back into Eq. (2) yields:

$$P_0^2 = 1 + \eta^2 (\xi - \zeta) \quad (4)$$

$$\frac{\partial^2 (P_0 P_1)}{\partial \theta^2} + \frac{\partial^2 (P_0 P_1)}{\partial \xi^2} = 0 \quad (5)$$

( $\xi = L/D$  -  $L$  = bearing length, inch -  $D$  = bearing diameter, inch -  $p$  = feeding constant, to be determined later).

Terms of higher order than the first shall be neglected, i.e., we assume that  $\epsilon$  is small.

In the center of the bearing ( $\theta = 0$ ) the mass flow through the feeding holes are set equal to the flow leaving through the bearing.

It shall be assumed that the flow through the feeding holes may be considered as a flow through two orifices in series with the same orifice coefficient, but with different flow area. Then the exact mass flow equation is:

$$A_1 \frac{M}{\sqrt{RT}} \cdot \bar{P}_s = \left( \frac{\bar{P}_2}{\bar{P}_s} \right)^{1/k} \sqrt{1 - \left( \frac{\bar{P}_2}{\bar{P}_s} \right)^{k-1}} = \frac{1}{\beta} \left( \frac{\bar{P}_2}{\bar{P}_s} \right) \left( \frac{\bar{P}_1}{\bar{P}_2} \right)^{1/k} \sqrt{1 - \left( \frac{\bar{P}_1}{\bar{P}_2} \right)^{k-1}} \quad (6)$$

( $M$  = mass flow, lbs. sec/in. -  $\bar{R}$  = gas constant, in.<sup>2</sup>/sec.<sup>2</sup>°R -  $T$  = absolute temperature, °R -  $\eta$  = adiabatic orifice coefficient -  $K$  = adiabatic exponent -  $\bar{P}_s$  = supply pressure, psia -  $\bar{P}_1$  = downstream pressure after second orifice, psia -  $\bar{P}_2$  = pressure between first and second orifice, psia -  $A_1$  = area of first orifice, in.<sup>2</sup> -  $\beta$  = area ratio between first and second orifice). In Eq. (6) the pressure ratio ( $\bar{P}_2/\bar{P}_s$ ) and ( $\bar{P}_1/\bar{P}_2$ ) cannot exceed the critical pressure ratio  $(2/(k+1))^{k/(k-1)}$ . To remove this discontinuity Eq. (6) shall be replaced by an approximate expression:

$$M = \frac{\phi A_1 \bar{P}_s}{\sqrt{\bar{R} T} \cdot \sqrt{1 + \beta^2}} \cdot \sqrt{1 - \left( \frac{\bar{P}_1}{\bar{P}_s} \right)^2} \quad (7)$$

( $\phi$  = orifice coefficient).

A graphical comparison between Eq. (6) and (7) based on  $K = 1.4$  shows that  $\alpha = .78 \cdot \sqrt{\eta}$  ; setting  $\eta = .95$  gives  $\alpha = .71$  which value has been used in the present calculations. The flow per inch circumference from the feeding holes is

$$\frac{NM}{2\pi R} \quad (N = \text{number of feeding holes}). \quad \text{Equating this to the flow per inch into the bearing: } -2 \frac{h^3}{12\mu} \frac{\bar{P}_i}{RT} \left( \frac{\partial \bar{P}}{\partial z} \right)_i \text{ gives: } \left( \frac{\partial P^2}{\partial \xi} \right) = -\Lambda_r \left[ 1 - \frac{3+2\sigma^2}{1+\sigma^2} \cos \theta \right] \sqrt{V^2 - P_i^2}$$

(8)

where:

$$\Lambda_r = \frac{6\mu Na^2 a}{P_a C^3} \cdot \sqrt{\frac{RT}{1+\sigma^2}}$$

(9)

( $\mu$  = viscosity, lbs.sec/in<sup>2</sup> -  $a$  = orifice radius, inch -  $V = P_s/P_a$ , pressure ratio -  $\sigma^2 = a^2/dC$ , orifice area ratio -  $d$  = diameter of feeding hole, inch).

Using Eq. (8) as a boundary condition to Eq. (4) and (5) and proceeding as in Ref. 10 we obtain the bearings load carrying capacity and flow:

$$W = \frac{1+\frac{3}{2}\sigma^2}{1+\sigma^2} \cdot \frac{\pi}{4} \mu R E \frac{3}{4} \left\{ \frac{e^{-u^2} [\psi(\sqrt{u^2+\xi}) - \psi(u)] - \frac{\sqrt{\pi}}{2} e^{u^2} [\phi(\sqrt{u^2+\xi}) - \phi(u)]}{\xi [\cosh \xi + \Lambda_r^2 u^2 \sinh \xi]} \right\} \Big|_0^{\xi} \quad (10)$$

$$Q = \frac{\pi C^3 P_a^2}{6\mu RT} \cdot \frac{1}{u^2} \cdot \frac{\text{lbs} \cdot \text{sec}}{\text{in}} \quad (11)$$

where:

$$u = \frac{1}{\gamma} = \left[ \frac{\xi \Lambda_r^2}{2} \left( -1 + \sqrt{1 + \frac{4(\gamma^2-1)}{\xi^2 \Lambda_r^2}} \right) \right]^{-1/2}$$

$$\psi(x) = \int_0^x e^{-t^2} dt \quad \phi(x) = \text{erf}(x) = \frac{2}{\sqrt{\pi}} \int_0^x e^{-t^2} dt$$

Except for the factor  $\frac{1+\frac{3}{2}\sigma^2}{1+\sigma^2}$  in Eq. (10) and the modification of  $\Lambda_r$  these two equations are identical with the results obtained in Ref. 10.

From Eqs. (9), (10), and (11) numerical results are obtained for the load carrying capacity and the flow. The results are plotted together with the experimental data

in figures 14 - 24. The calculations are based on the following data:

Bearing length-to-diameter ratio  $\xi = \frac{1}{2}$

Bearing radius  $R = 1$  inch

Radial clearance  $C = .0005$  inch -  $.001$  inch -  $.0015$  inch

Diameter of feeding hole:  $d = .052$  inch

Number of feeding holes:  $N = 8$

Orifice coefficient  $\lambda = .71$

Orifice radius  $a = .0055$  inch -  $.010$  inch -  $.015$  inch

Ambient pressure  $P_a = 14.7$  psia

Supply pressure  $P_s = 50$  psia -  $100$  psia -  $150$  psia -  $200$  psia

Gas viscosity  $\mu = 2.828 \times 10^{-9}$  lbs.sec/in.<sup>2</sup> (air at 70°F)

Gas constant  $\times$  Total temperature  $R T = 339,300$  lbs.in/lbs. (air at 70°F)

#### Whirl Analysis

If one accepts the model of a constant speed whirl motion centering around the axis of the bearing such that the orbit of the shaft center is a circle, then it has been shown rigorously, for an isothermal gas film, that the effective bearing number is (Refs. 1, 2, 3):

$$\Lambda^* = \Lambda \left( 1 - \frac{2\dot{\theta}}{\omega} \right);$$

where  $\Lambda = \frac{6\mu\omega}{P_a} \left( \frac{R}{C} \right)^2$

More specifically, with the approximations of small  $\Lambda^*$  and  $e/C$  the hydrodynamic film forces during a steady translatory whirl motion are:

$$\begin{aligned} F_{rh} &= K_2 (\omega - 2\dot{\theta})^2 e; \\ F_{th} &= K_1 (\omega - 2\dot{\theta}) e; \end{aligned} \tag{12}$$

where  $K_1$  and  $K_2$  are functions of  $\Lambda$  and  $L/D$ , and have the dimensions of the product of the stiffness and the first and second powers of time respectively. Using these relations, following an analysis otherwise similar to reference 4, the conditions for neutral stability (self-sustained whirl motion) are:



$$\frac{\Omega}{\omega_0} = \frac{1}{\sqrt{1 - \omega_0^2 (\tau_1 - \tau_2)^2 \frac{k_s K_2}{(K_1)^2}}} \quad (13)$$

$$\frac{\omega}{\Omega} = 2 + (\tau_1 - \tau_2) \frac{k_s}{K_1} \quad (14)$$

where

$\Omega$  = whirl speed,

$\omega$  = shaft speed at neutral stability,

$\tau_1, \tau_2$  = lead and lag time constants of pressurization system.

$$\omega_0 = \sqrt{\frac{2 k_s}{m}}$$

Above results also employed the assumption

$$\tau_2^2 \Omega^2 \ll 1$$

The above result can be rearranged as

$$\lambda = \frac{\omega}{\Omega} - 2 = (\tau_1 - \tau_2) \frac{k_s}{K_1} \quad (15)$$

$$\frac{\Omega}{\omega_0} = \frac{1}{\sqrt{1 - \frac{2K_2}{m} \lambda^2}} \quad (16)$$

which reveals the interesting conclusion that the self-sustained whirl can be suppressed if

$$\frac{2K_2}{m} \geq \frac{1}{\lambda^2}$$

## V. CONCLUSIONS

1. Good agreement on load carrying capacity and flow for certain clearance values was noted. The disagreements between test and theoretical results for other clearances can be attributed to the assumption of constant coefficient of discharge in calculations which was matched for one particular clearance, but could have been matched for other clearances.
2. Based on load carrying capacity solutions, good agreement between calculated and observed system criticals was obtained.
3. Onsets of fractional-frequency whirl are a function of bearing geometry, load, speed and supply pressure.
4. Hybrid bearings, depending upon supply pressure level and bearing geometry, can be subject to hydrodynamic forces which will have a net effect of producing destructive self-sustained whirl at speeds lower than that of onset of half-frequency whirl, if the bearings had been purely self acting (see figures 4-9)
5. Effects of increase in load on onset of fractional-frequency whirl are pronounced at low supply pressures when self acting effects predominate; same, however, become negligible when supply pressures are raised to the point where static load carrying capacity of the hydrostatic bearing does not result in significant eccentricity at the higher pressures and given load.
6. Air flow in hybrid bearings decreases as speed increases.
7. Theoretical analysis indicates that whirl ratio is a function of lead and lag time constants and the ratio of hydrostatic gas film stiffness to the tangential hydrodynamic gas film stiffness. The whirl ratio can be larger or smaller than 2 depending on the sign of the difference between lead and lag time constants. When hydrostatic effects become negligible, the ratio approaches a limit of 2.
8. Theoretical calculations indicate that onset of FFW can be suppressed if

$$2 K_2/m \geq \frac{\omega^2}{\omega_1^2}$$

## VI. REFERENCES

1. "Static and Dynamic Characteristics of Compensated Gas Bearings", H. Richardson, ASME Paper No. 57-A-138, January 10, 1958.
2. "The Performance of Externally Pressurized Bearings Using Simple Orifice Restrictors", D.S. Allan, P.T. Stokes, S. Whitley, UKAEA, Capenhurst, England, ASLE Preprint No. 60LC-17, Boston, October 17-19, 1960.
3. "Analysis and Design of Externally Pressurized Gas Bearings", I.C. Tang, W.A. Gross, IBM, San Jose, California, ASLE Preprint No. 61LC-20, Chicago, October 17-19, 1961.
4. "Theory of Hydrodynamic Lubrication", O. Pinkus and B. Sternlicht, McGraw-Hill Publication, May, 1961.
5. "On the Hybrid Gas Lubricated Journal Bearing", J. Lund, ONR Contract, February, 1962.
6. "On the Load Capacity and Stability of Rotors in Cylindrical Gas-Dynamic Journal Bearings", B. Sternlicht, L.W. Winn, ONR Report, Contract No. 2844(00), Task No. 097-348, July 3, 1961.
7. "Geometry Effects on the Threshold of Half-Frequency Whirl in Gas Dynamic Journal Bearings", B. Sternlicht, L.W. Winn, ONR Report, Contract No. 2844(00), Task No. 097-348, October 16, 1961.
8. "Some Instabilities and Operating Characteristics of High Speed Gas Lubricated Journal Bearings", G.K. Fischer, J.L. Cherubin, D.D. Fuller, ASME Publication, 58-A-231, November 30, 1958.
9. "Gas Bearing Stability Study-Vertical Rotor Investigation", R.C. Elwell, R.J. Hooker, B. Sternlicht, NOKR 2844(00), Task No. 097-348, May 20, 1960.
10. "The Theory of the Externally-Pressurized Bearing with Compressible Lubricant", G. Heinrich, First International Symposium on Gas Lubricated Bearings, ONR/AGR-49.
11. "On the Translatory Whirl Motion of a Vertical Rotor in Plain Cylindrical Gas-Dynamic Journal Bearings", C.H.T. Pan and B. Sternlicht, May 8, 1961, ONR Report, Also ASME Paper No. 61-LUB-4.
12. "Gas-Lubricated Cylindrical Journal Bearings of Finite Length - Part II, Dynamic Loading," B. Sternlicht, September 9, 1960, ONR Report.
13. "A Preliminary Study of Whirl Instability for Pressurized Gas Bearings", R. H. Larson and E.H. Richardson, ASME Paper WC-61-113.

VII. APPENDIX A

Table I - Instabilities

Table II - Comparison of Observed with Calculated Criticals

Table I

Instabilities

L/D = .5, D = 2.00", W = 6.57 lbs/brg.

## 8 Orifices in Central Plane

\*Calculated - all others observed on test

C = 0.0005"						
Orifice Dia. IN.	Press. PSIA	$\omega_c$ RPM	$\omega_T$ RPM	FFW RPM	4/3	5/3
0.030	50			12,600		
0.020	80			16,700		
	100	13,400*	17,200*	21,640	1.285*	1.61
	150	22,000*	28,300*	33,000	1.285*	1.50
0.011	50			11,700		
	80			16,300		
	100	16,800*	21,600*	22,500	1.285*	1.34*
	150	25,800*	33,200	33,000	1.285*	1.28*
C = 0.001"						
0.030	50	7,680	10,200	16,240	1.33	2.12
	80	12,100	16,500	38,640	1.36	3.18
	100	14,300	20,780	54,220	1.45	3.80
	150	16,600	22,000	62,260	1.32	3.75
0.020	50	7,600	10,200	16,280	1.34	2.14
	80	12,000	16,400	35,300	1.36	2.94
	100	13,500	21,200	51,000	1.57	3.78
	150	16,000	22,600	62,300	1.41	3.90
	200	17,000	23,500	70,000	1.38	4.12
0.011	50	8,000	11,600	15,350	1.45	1.92
	80	11,000	16,600	22,000	1.51	2.00
	100	12,600	20,800	40,600	1.65	3.22
	150	Air hammer				
C = 0.0015"						
0.030	50	6,700	9,500	23,000	1.42	3.43
	80	8,100	11,600	38,500	1.43	4.75
	100	8,900	13,000	55,000	1.46	6.20
	150	10,000	14,400	64,000	1.44	6.40
0.020	50	6,700	9,300	20,600	1.39	3.08
	80	8,100	11,600	35,600	1.43	4.40
	100	8,870	12,400	47,000	1.40	5.30
	150	9,800	14,200	62,000	1.45	6.42
0.011	50	6,000	8,000	17,000	1.33	2.84
	80	7,000	9,030	21,200	1.29	3.03
	100	7,800	11,200	22,400	1.44	2.88
	150	10,100	12,450	25,200	1.235	2.50

TABLE II

CriticalsComparison of Observed with Calculated Criticals

L/D = .5, D = 2.00"

W = 6.57 #/bearing

Orifice Dia. in.	Radial Clearance in.	Press. PSIA	$\omega_c$		$\omega_T$		*
			Obs. RPM	Calc. RPM	Obs. Rpm	Theo. Rating RPM	Calc. RPM
0.030	0.0005	50				14,238	
0.020		100		13,400		28,743	17,200
		150		22,000		37,395	28,300
0.011		50				17,953	
		100		16,800		32,458	21,600
		150		25,800		41,014	33,200
0.030	0.001	50	7,680	9,230	10,200	14,047	11,870
		100	14,300	16,860	20,780	20,120	21,700
		150	16,600	19,150	22,000	23,682	24,600
0.020		50	7,600	9,240	10,200	14,524	11,870
		100	13,500	16,600	21,200	20,455	21,300
		150	16,000	19,700	22,600	24,064	25,300
		200	17,000	22,000	23,500	26,566	28,300
0.011		50	8,000	11,350	11,600	14,911	14,600
		100	12,600	17,800	20,800	20,101	22,900
		150	Air Hammer			23,472	
0.030	0.0015	50	6,700	8,000	9,500	10,600	10,280
		100	8,900	10,900	13,000	13,751	14,000
		150	10,000	12,150	14,400	16,024	15,600
0.020		50	6,700	8,050	9,300	10,418	10,300
		100	8,100	10,000	12,400	13,385	13,600
		150	9,800	11,920	14,200	16,243	15,300
0.011		50	6,000	6,820	8,000	8,699	8,760
		100	7,800	9,620	11,200	10,217	12,370
		150	10,100	11,000	12,450	14,052	14,200


\* Calculated from static load carrying capacity curves

\*\* Calculated on basis of  $\omega_T = 1.285$  $\omega_c$

## VII. APPENDIX B


<u>List of Figures</u>	<u>Description</u>
Figure 1	Test Rig
Figure 2	Orifice Holder
Figure 3	Thrust Plate Detail
Figures 4 - 9	Results on Onset of FFW
Figures 10 -11	CRO Pictures on Dynamic Behavior of Shaft in Externally Pressurized Bearing
Figure 12	FFW vs. Supply Pressure
Figure 13	FFW vs. Load
Figures 14 - 21	Load vs. Eccentricity Curves
Figures 22 - 24	Flow vs. Supply Pressure
Figures 25 - 26	Effect of Speed on Flow

MAT 10159

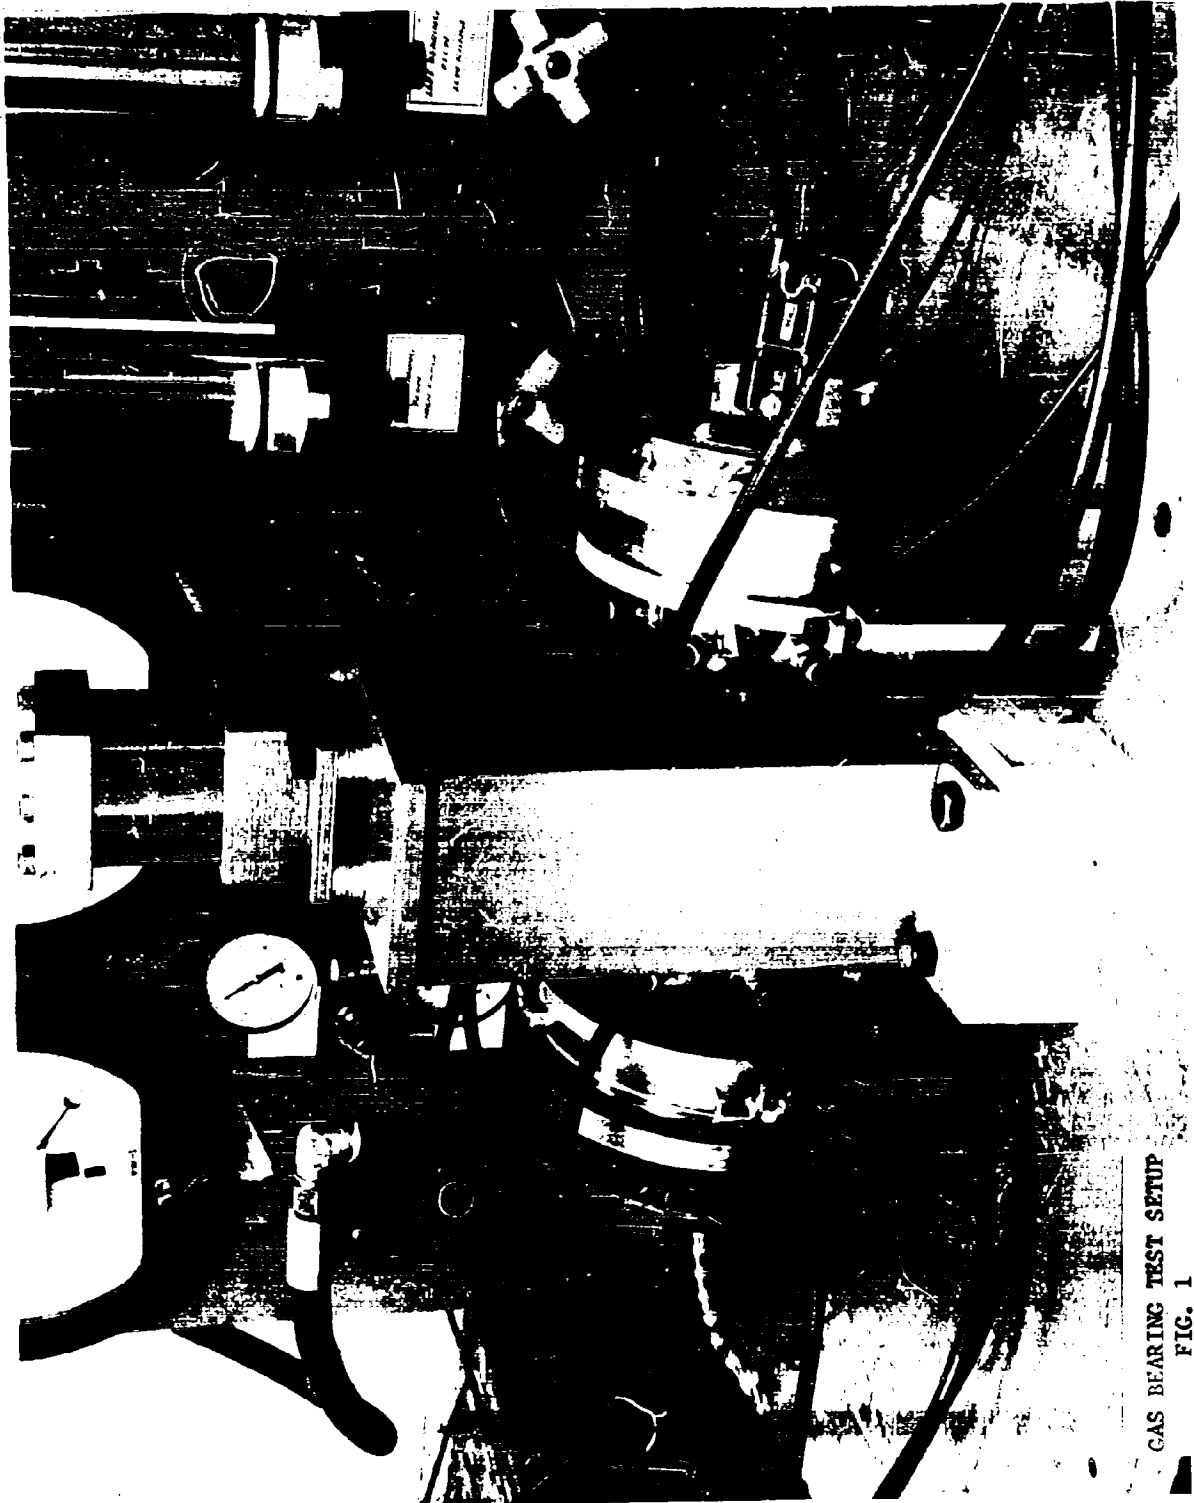


GAS BEARING TEST SETUP  
FIG. 1



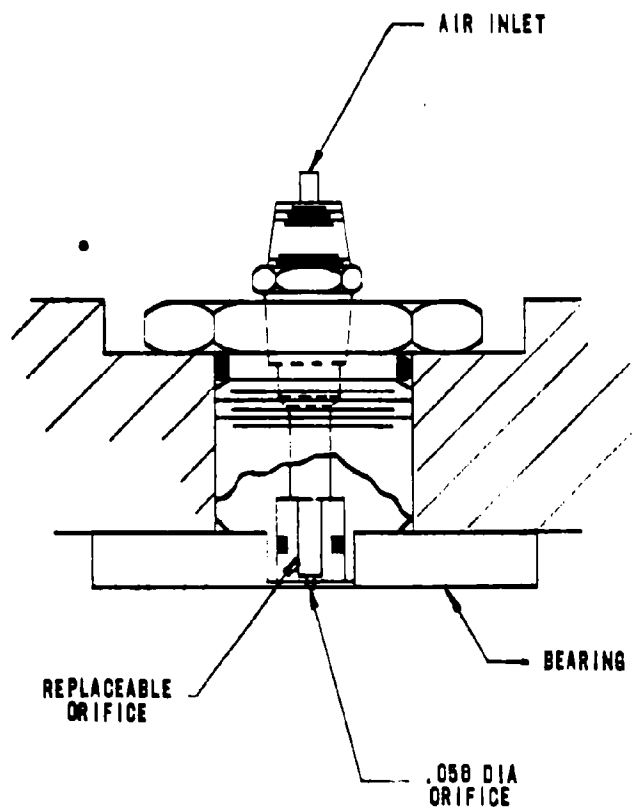

ORIFICE HOLDER  
FIG. 2

AIR INLET

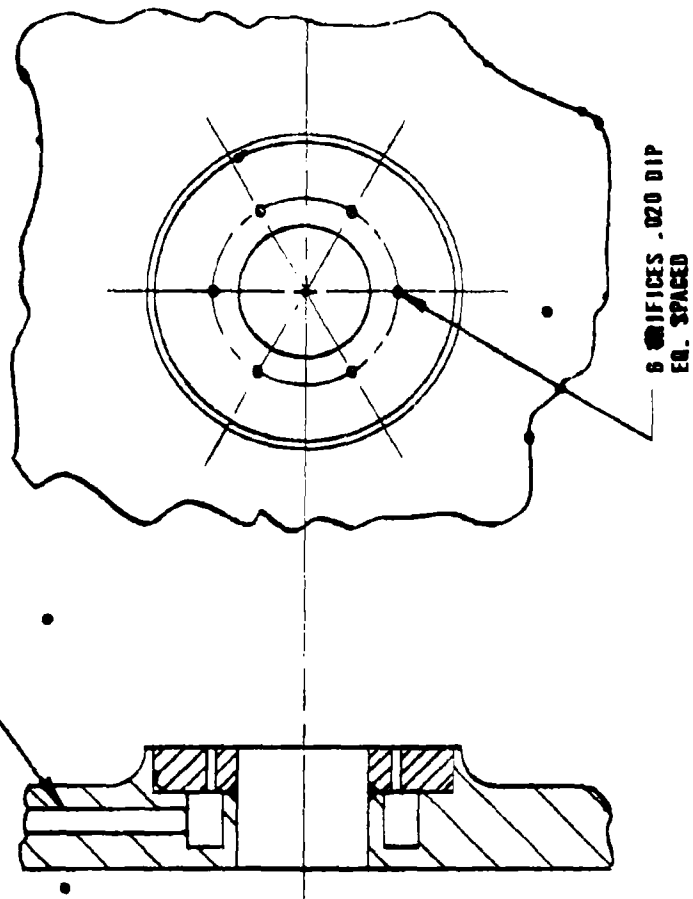

8 ORIFICES .020 DIP  
EQ. SPACED

THRUST PLATE  
FIG. 3

ONSET OF FRACTIONAL FREQUENCY WHIRL  
VS.  
SUPPLY PRESSURE  
(Effects of clearance)

L/D = .5  
D = 2.00"  
C = .0005"  
○-a = .015"  
-a = .010"  
△-a = .0055"  
W = 6.57 LBS/BRG.


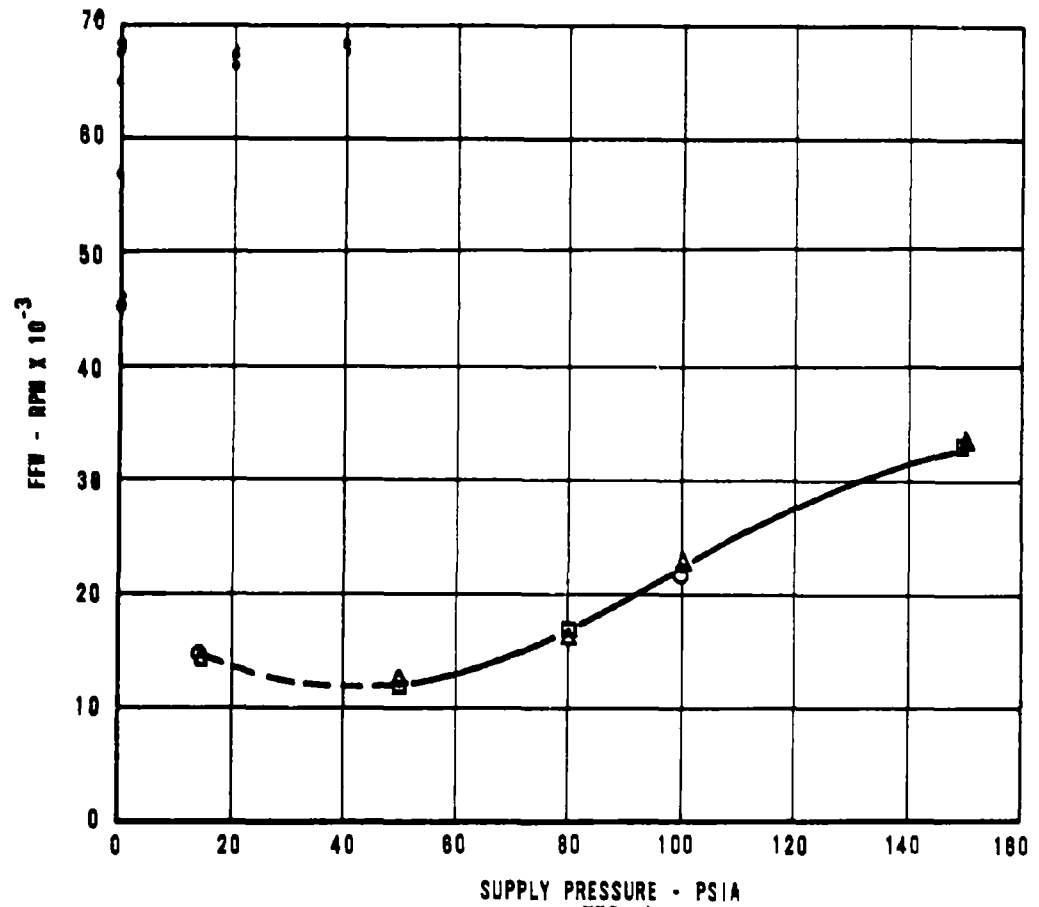


FIG. 4


ONSET OF FRACTIONAL FREQUENCY WHIRL  
VS.  
SUPPLY PRESSURE  
(Effects of orifice size)

L/D = .5  
D = 2.00"  
C = .001"  
○-a = .015"  
•-a = .010"  
△-a = .0055"  
W = 0.57 LBS/BRG.

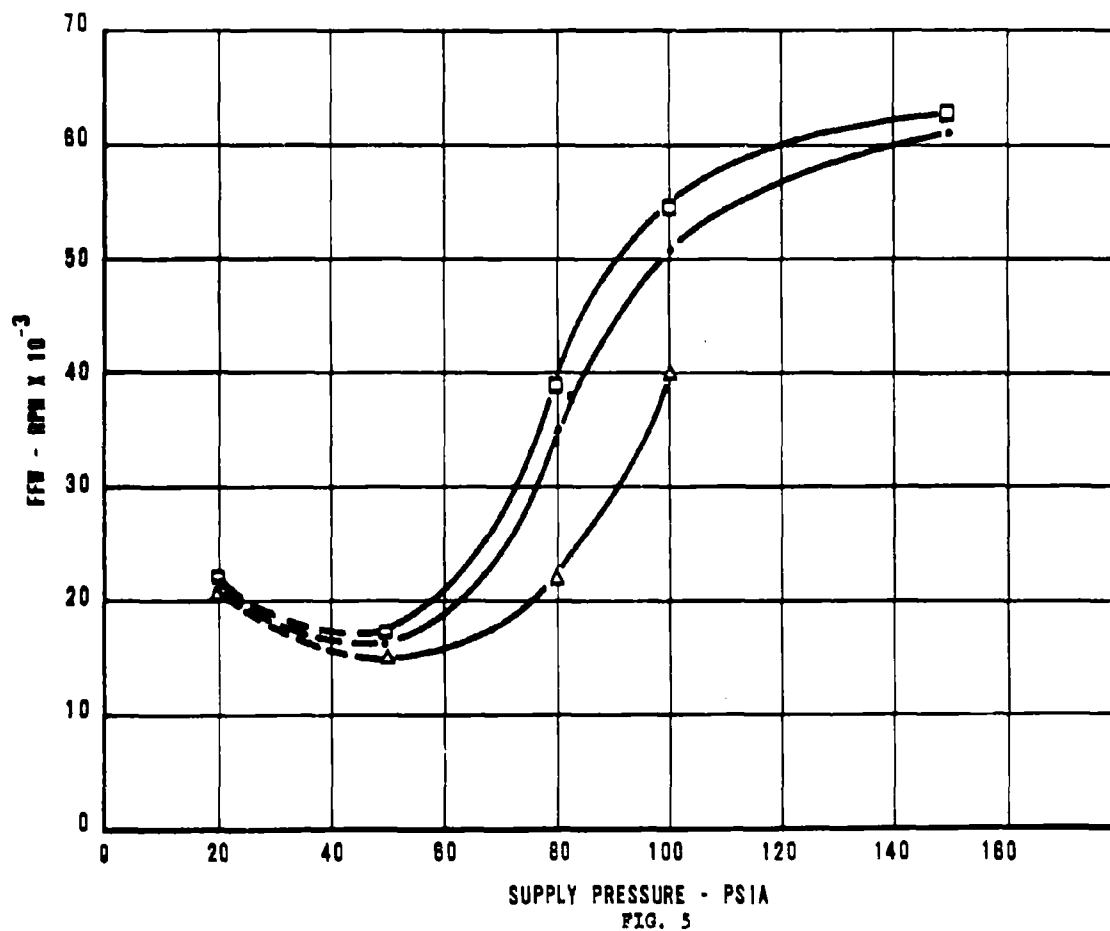

$L/D = .5$   
 $D = 2.08"$   
 $C = .0015"$   
 $\phi-a = .015"$   
 $-a = .010"$   
 $A-a = .0055"$   
 $W = 6.57 \text{ LBS/BRE.}$

**ONSET OF FRACTIONAL FREQUENCY WHIRL**  
**VS.**  
**SUPPLY PRESSURE**  
 (Effects of orifice size)

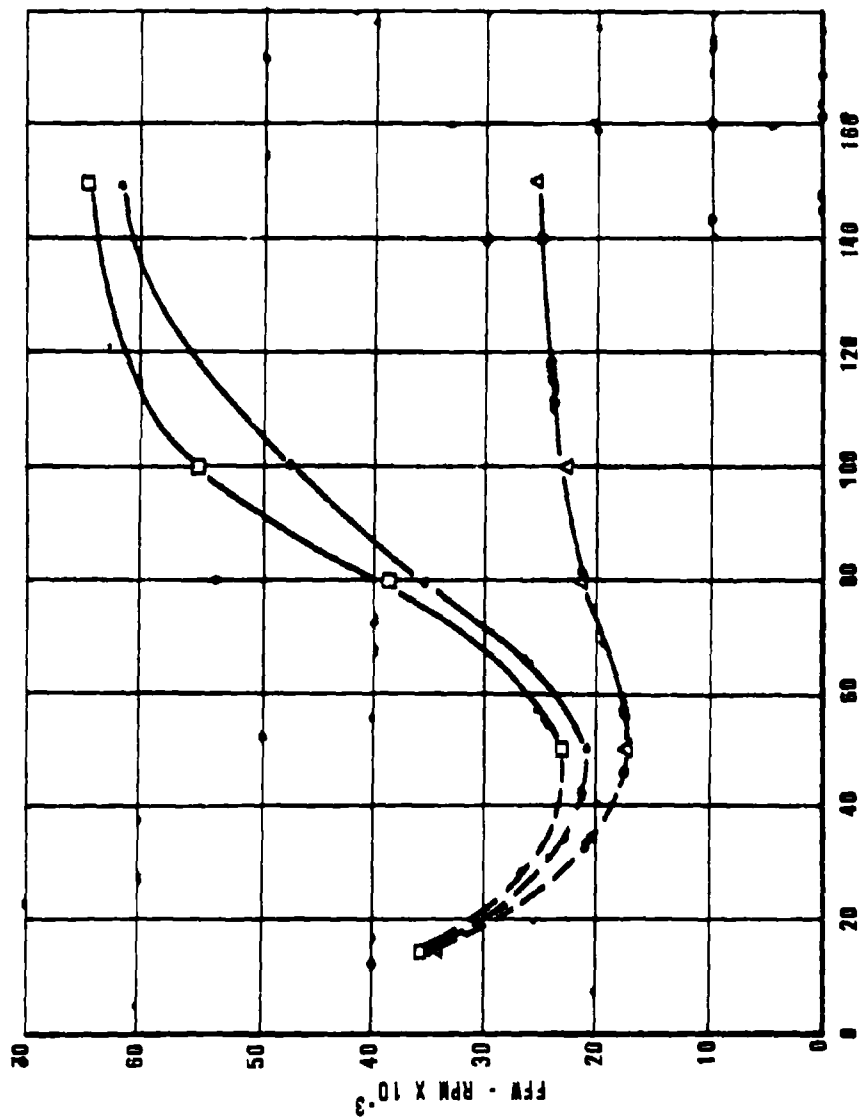

SUPPLY PRESSURE - PSIA  
 FIG. 6

ONSET OF FRACTIONAL FREQUENCY WHIRL  
VS  
SUPPLY PRESSURE  
(Effects of clearance)

L/B = .5  
D = 2.00"  
a = .0055"  
-e = .0005"  
□-e = .001"  
A-e = .0015"  
W = 8.57 LBS.

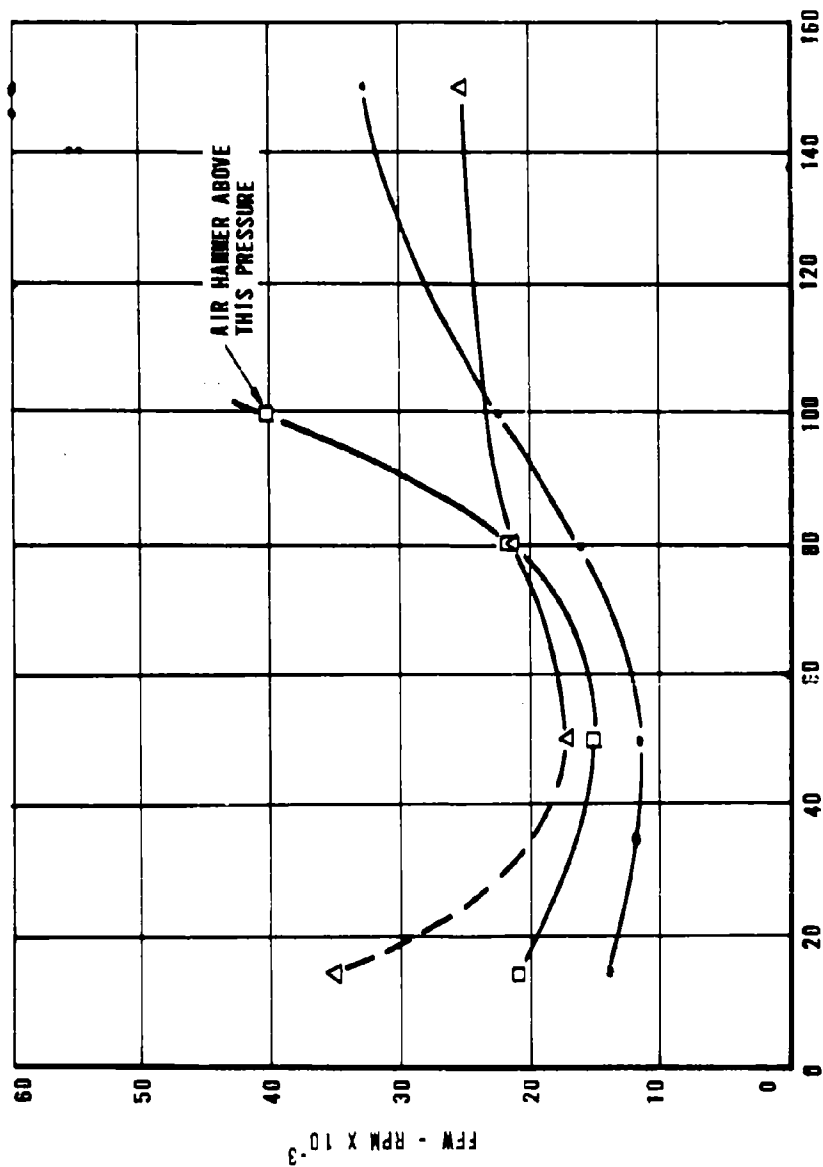


FIG. 7

ONSET OF FRACTIONAL FREQUENCY WHIRL  
VS.  
SUPPLY PRESSURE  
(Effects of clearance)

L/D = .5  
D = 2.00"  
a = .010"  
c = .0005"  
□-c = .001"  
△-c = .0015"  
W = 8.67 LBS.

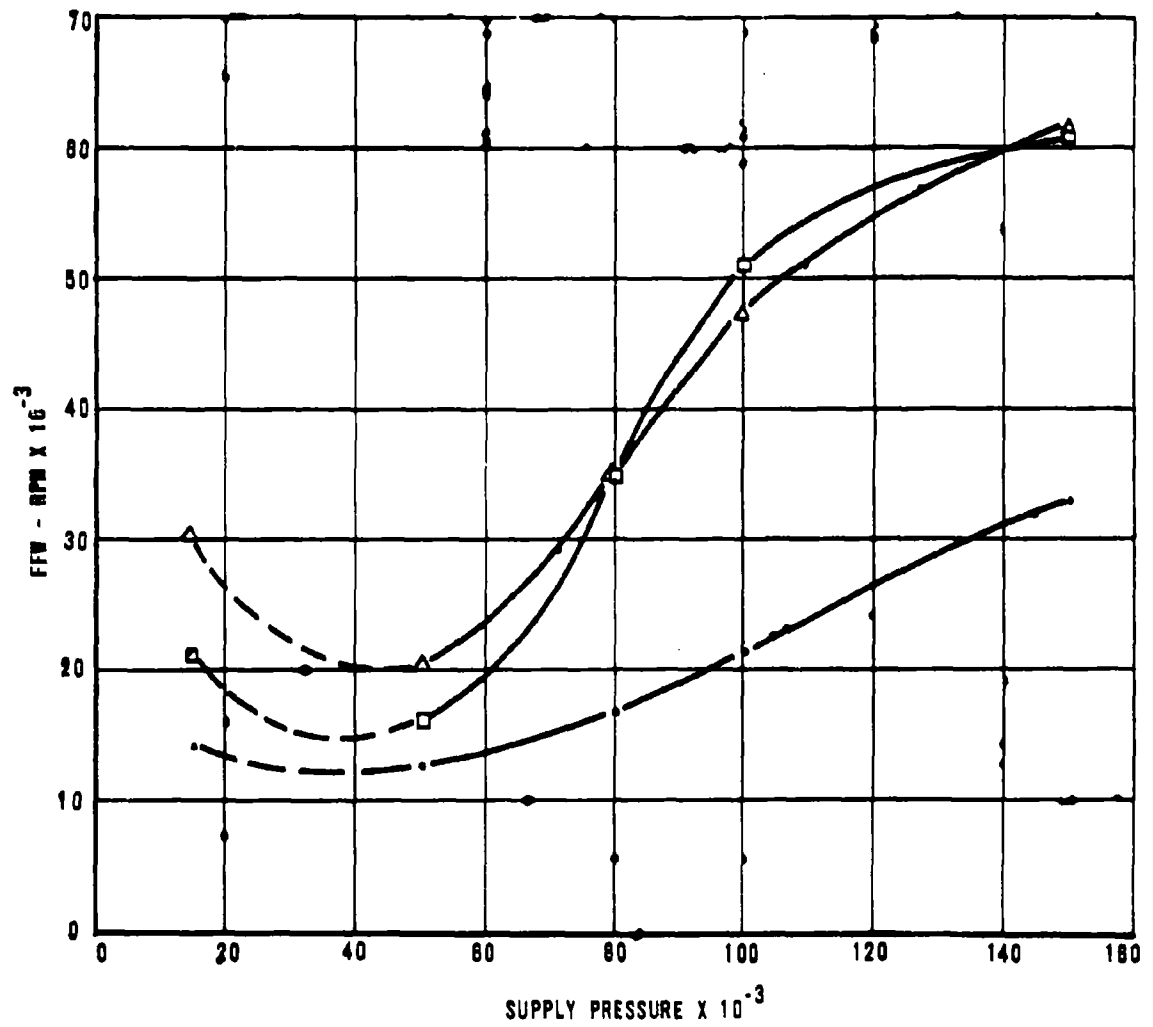


FIG. 8

# ONSET OF FRACTIONAL FREQUENCY WHIRL VS.

SUPPLY PRESSURE  
(Effects of clearance)

L/D = .5  
D = 2.00"  
B = .015"  
.-C = .0005"  
□-C = .001"  
△-C = .0015"  
W = 6.57 LBS.

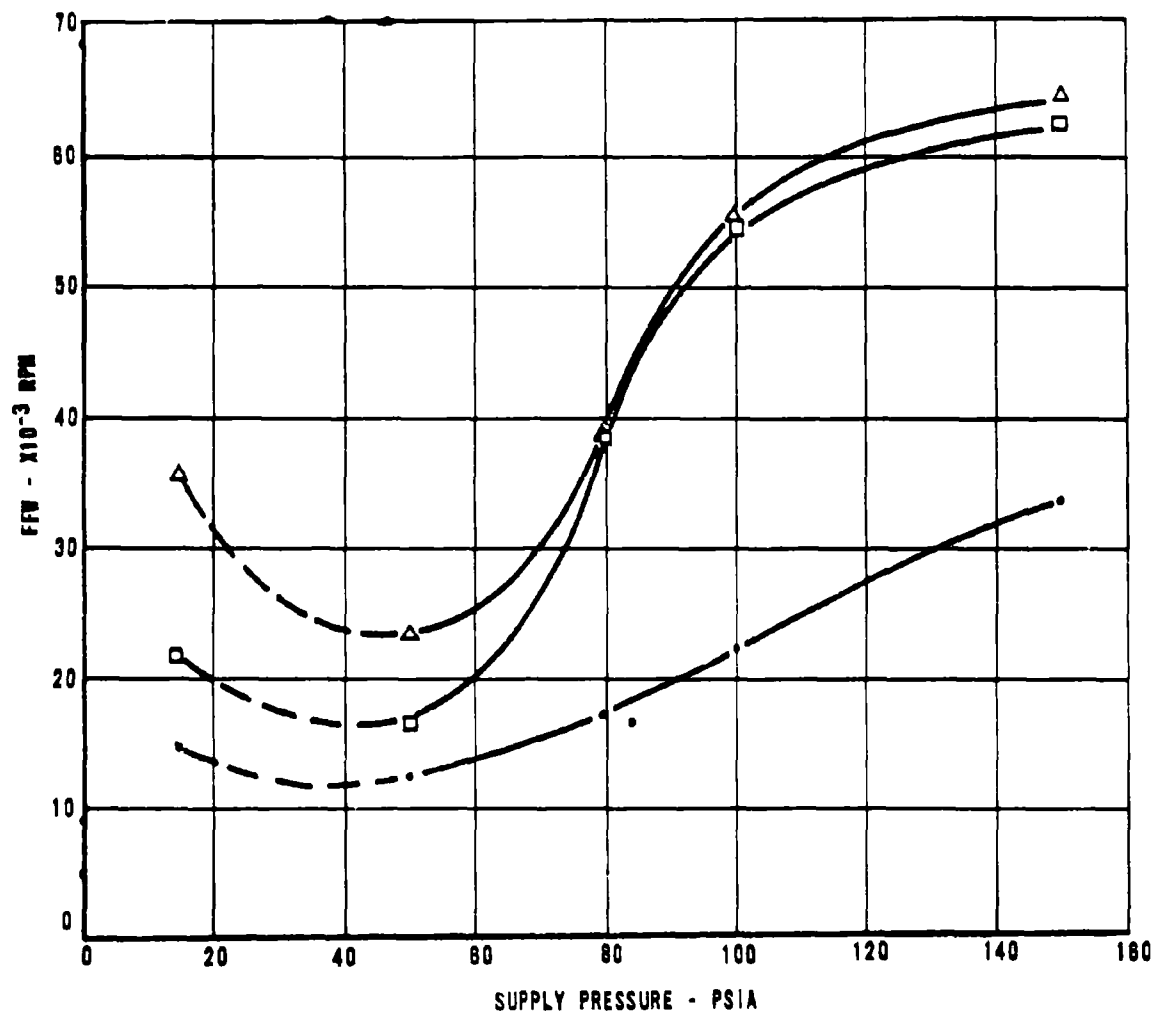


FIG. 9




Dynamic Behavior of Shafts Supported on Externally Pressurized Bearings


Load 6.57 lbs/bearing

$c = .0005"$


$a = .015"$




P = 50 psia  
Static dot - bottom  
2,000 RPM  
5,000 RPM  
10,000 RPM



P = 100 psia  
Static dot - 1 grad.  
2,000 RPM  
10,000 RPM (large ampl.)  
17,000 RPM



P = 150 psia  
Static  
10,000 RPM  
20,000 RPM (large ampl.)  
30,000 RPM



P = 200 psia  
Static  
10,000 RPM  
20,000 RPM (large ampl.)  
30,000 RPM

FIG. 10


Dynamic Behavior of Shafts Supported on Externally Pressurized Bearings

Load 6.57 lbs/bearing


$c = .001"$

$a = .015"$


$P = 50$  psia




Static



7680 RPM (large ampl.)  
8300 RPM



10,000 RPM (large ampl.)  
15,000 RPM



16,246 RPM  
onset of whirl

FIG. 11

$L/D = .5$   
 $D = 2.0"$   
 $a = .015"$   
 $C = .0005"$   
 $\text{LOAD/RMG.} = 0$   
 $\odot = 6.57 \text{ LBS}$   
 $\Delta = 20.0 \text{ LBS}$

# FFW VS SUPPLY PRESSURE

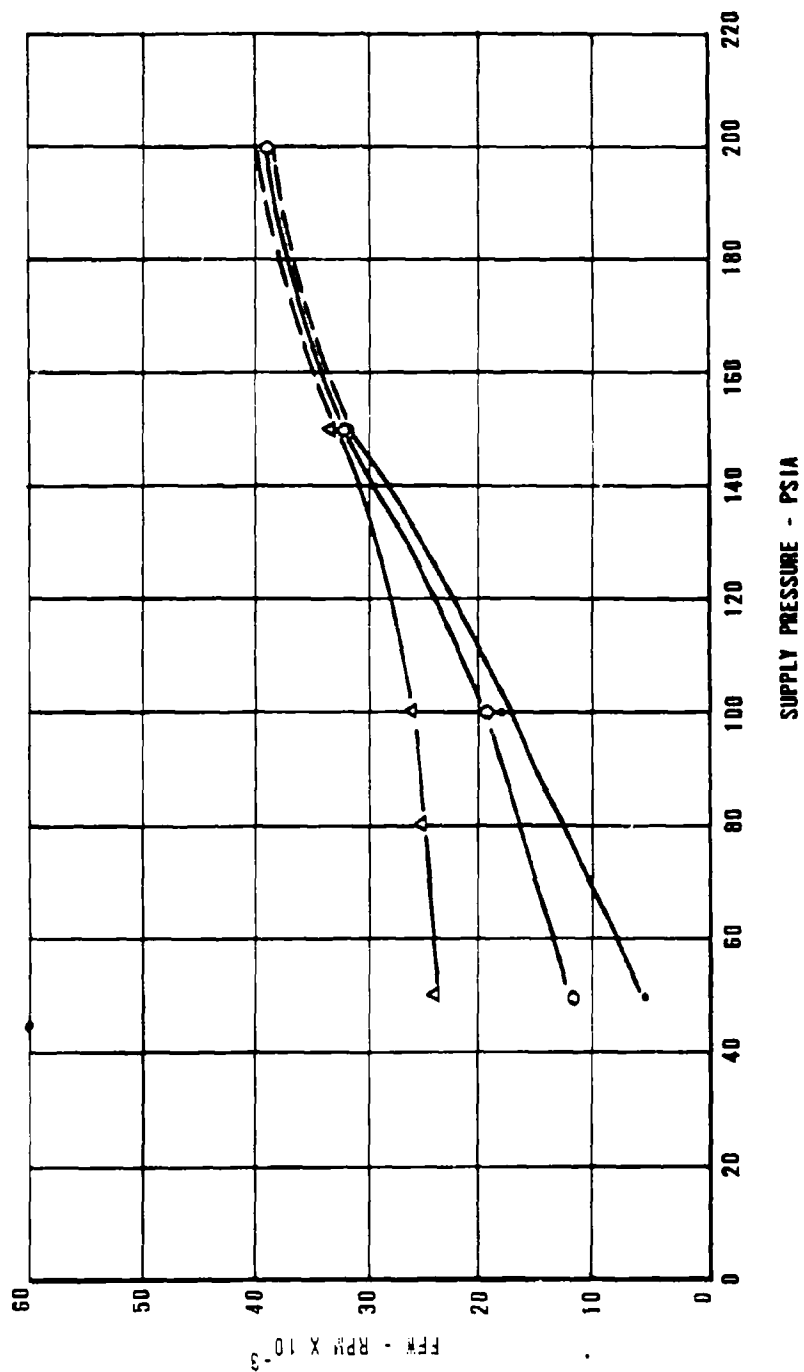


FIG. 12

# FFW VS. LOAD

$L/D = .5$   
 $D = 2.0"$   
 $C = .001"$   
 $P_s = 50 \text{ PSIA}$   
 $\odot - B = .015"$   
 $\cdot - B = .010"$   
 $\Delta - B = .005"$

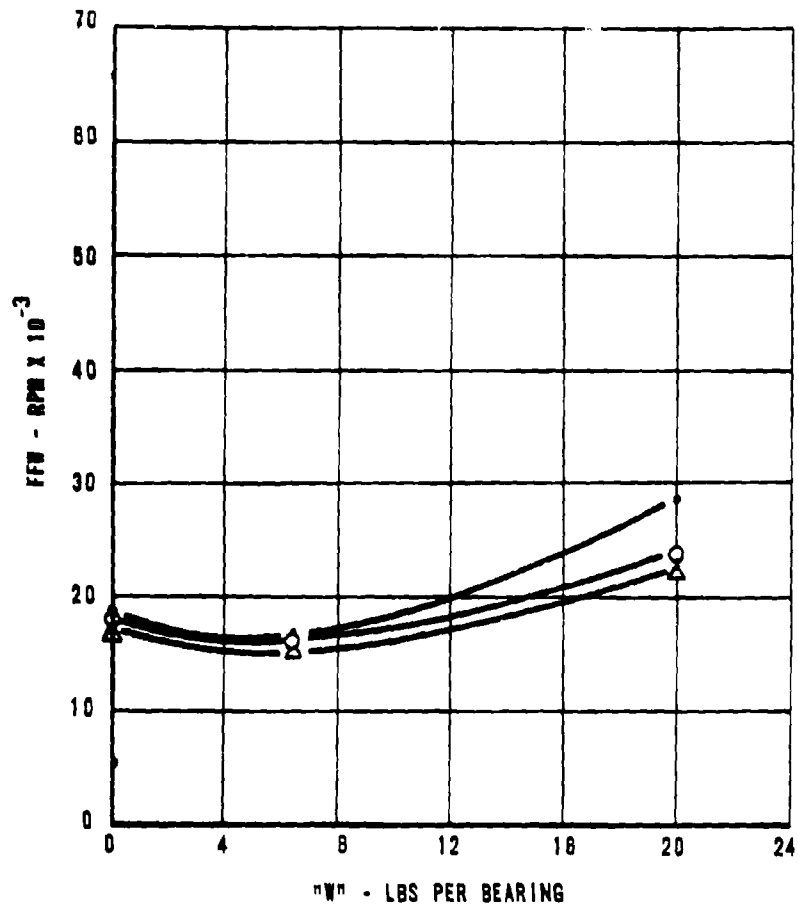


FIG. 13

# LOAD VS. ECCENTRICITY

L/D = .5  
D = 2.0"  
C = .0005"  
a = .0055"

— TEST  
--- THEORY

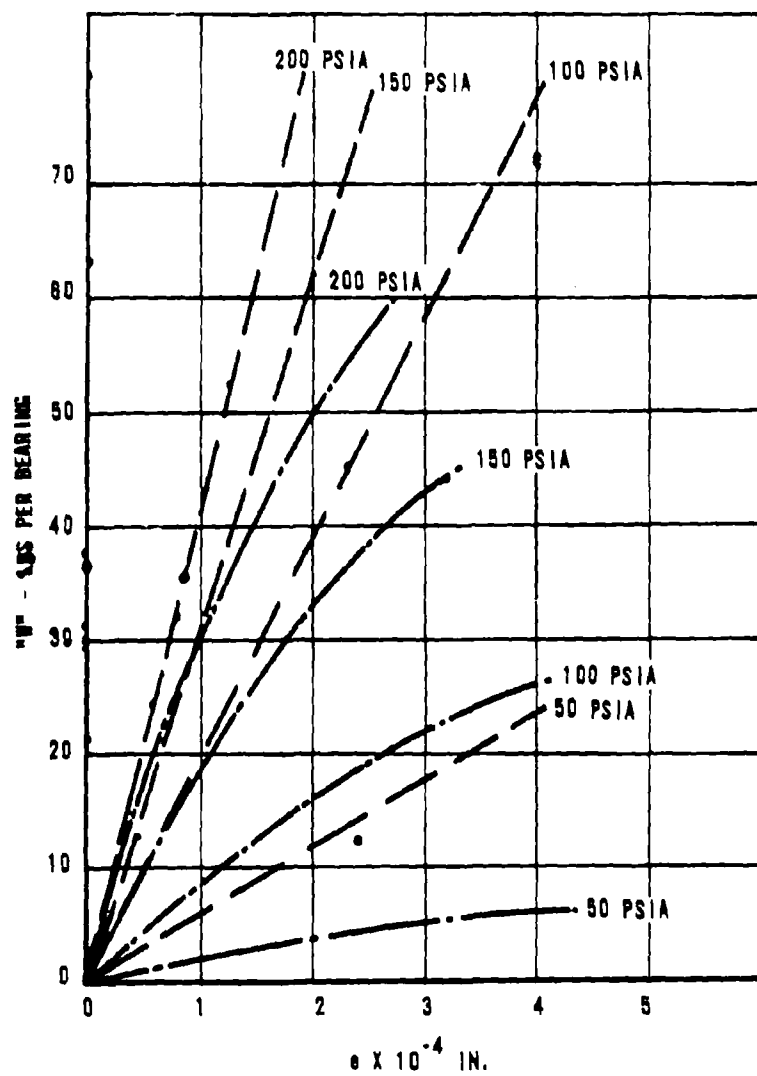


FIG. 14

# LOAD VS. ECCENTRICITY

$L/D = .5$   
 $D = 2.0"$   
 $C = .0005"$   
 $a = .015"$   
 $\odot a = .010"$

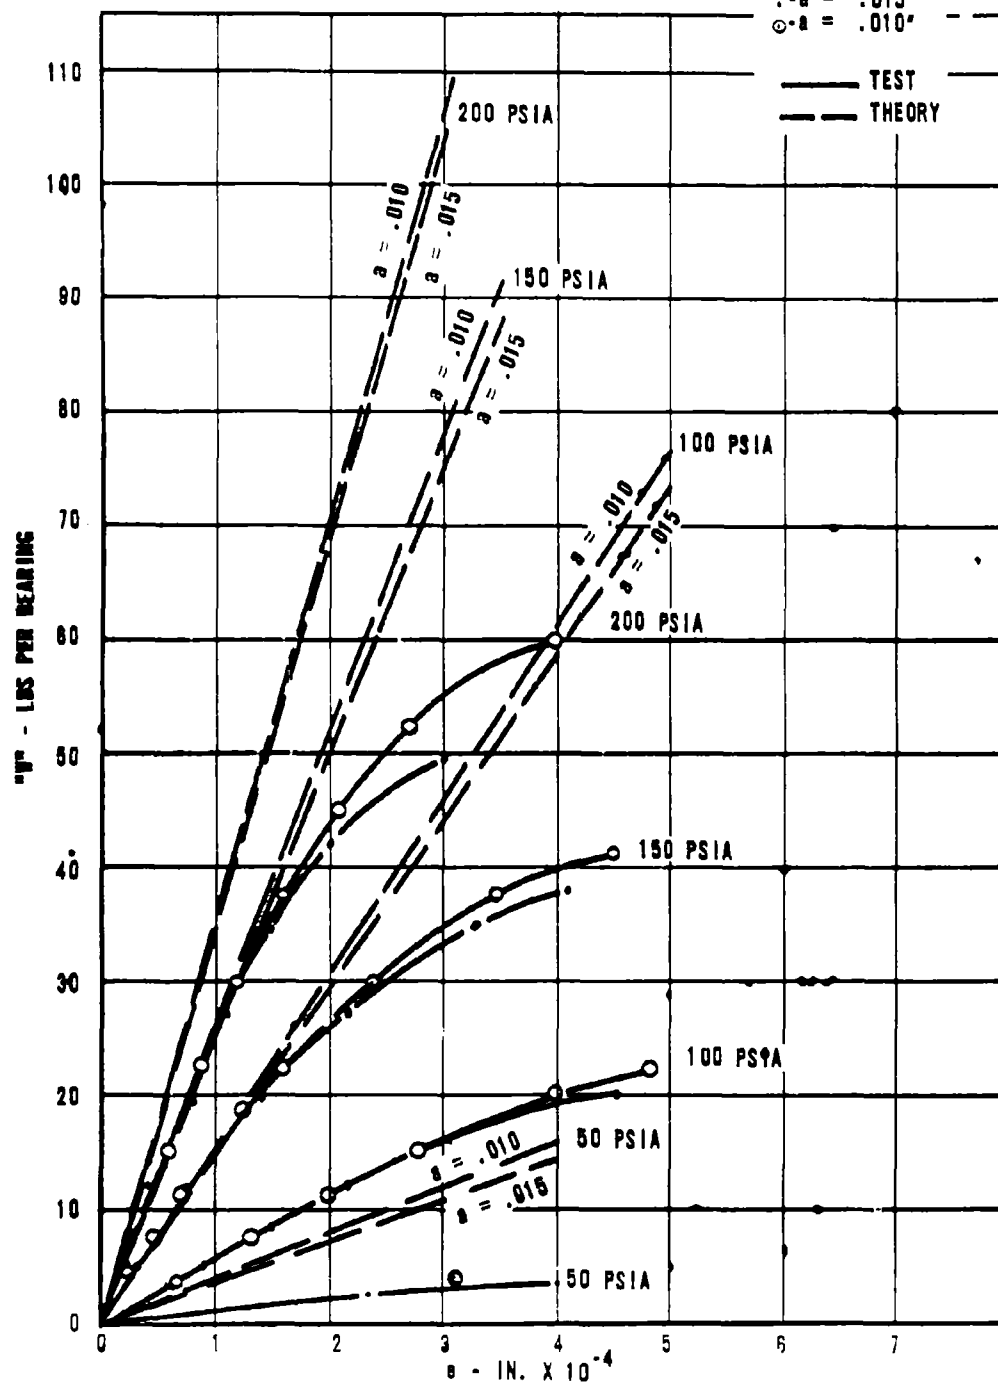


FIG. 15

# LOAD VS. ECCENTRICITY

$L/D = .5$   
 $D = 2.0"$   
 $C = .001"$   
 $\alpha = .0055"$

——— TEST  
 - - - - THEORY

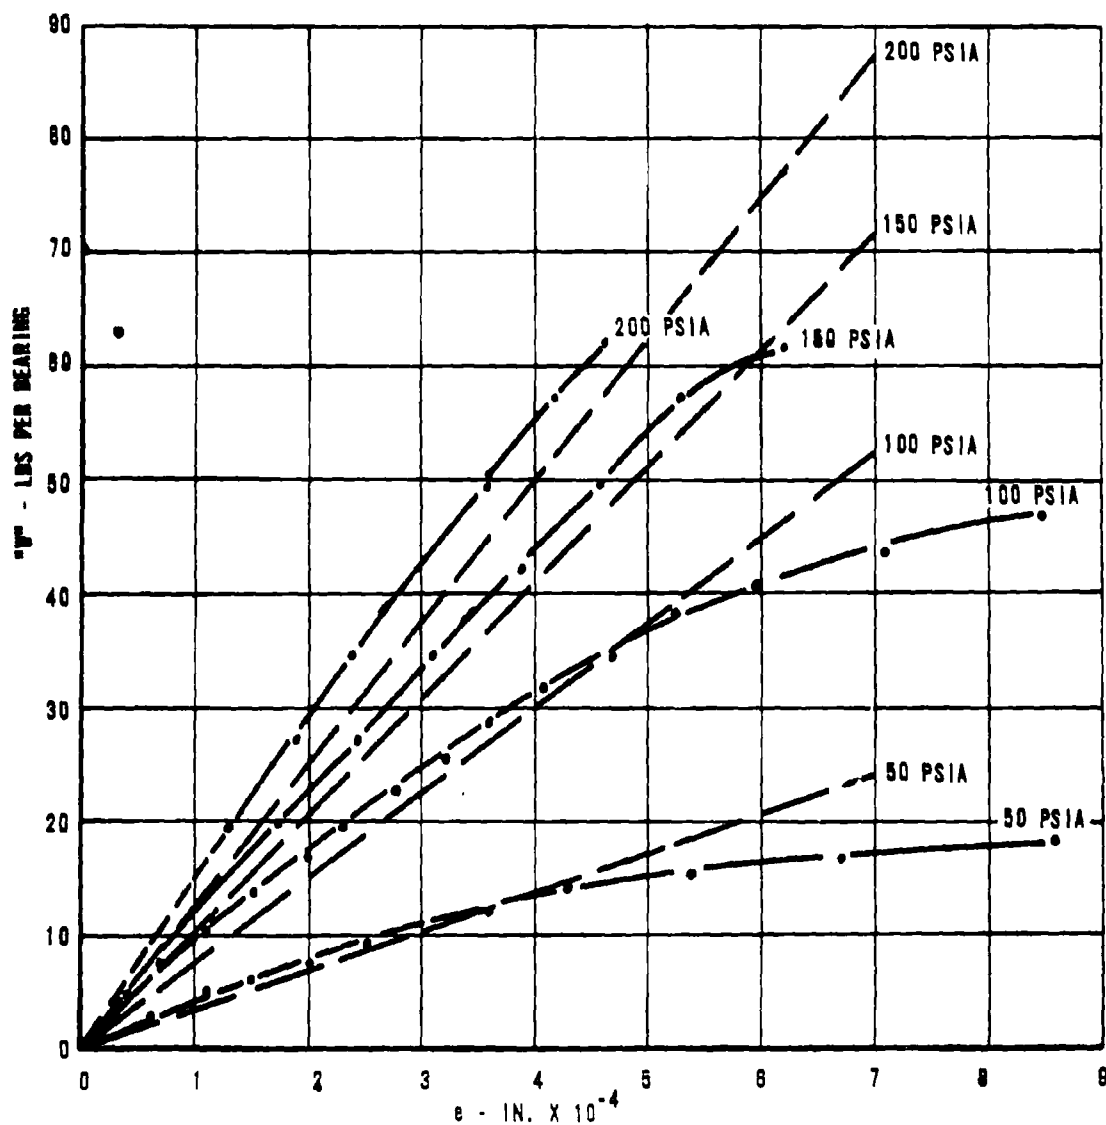


FIG. 16

# LOAD VS. ECCENTRICITY

$L/D = .5$   
 $D = 2.0"$   
 $C = .001"$   
 $\alpha = .010"$

——— TEST  
 - - - THEORY

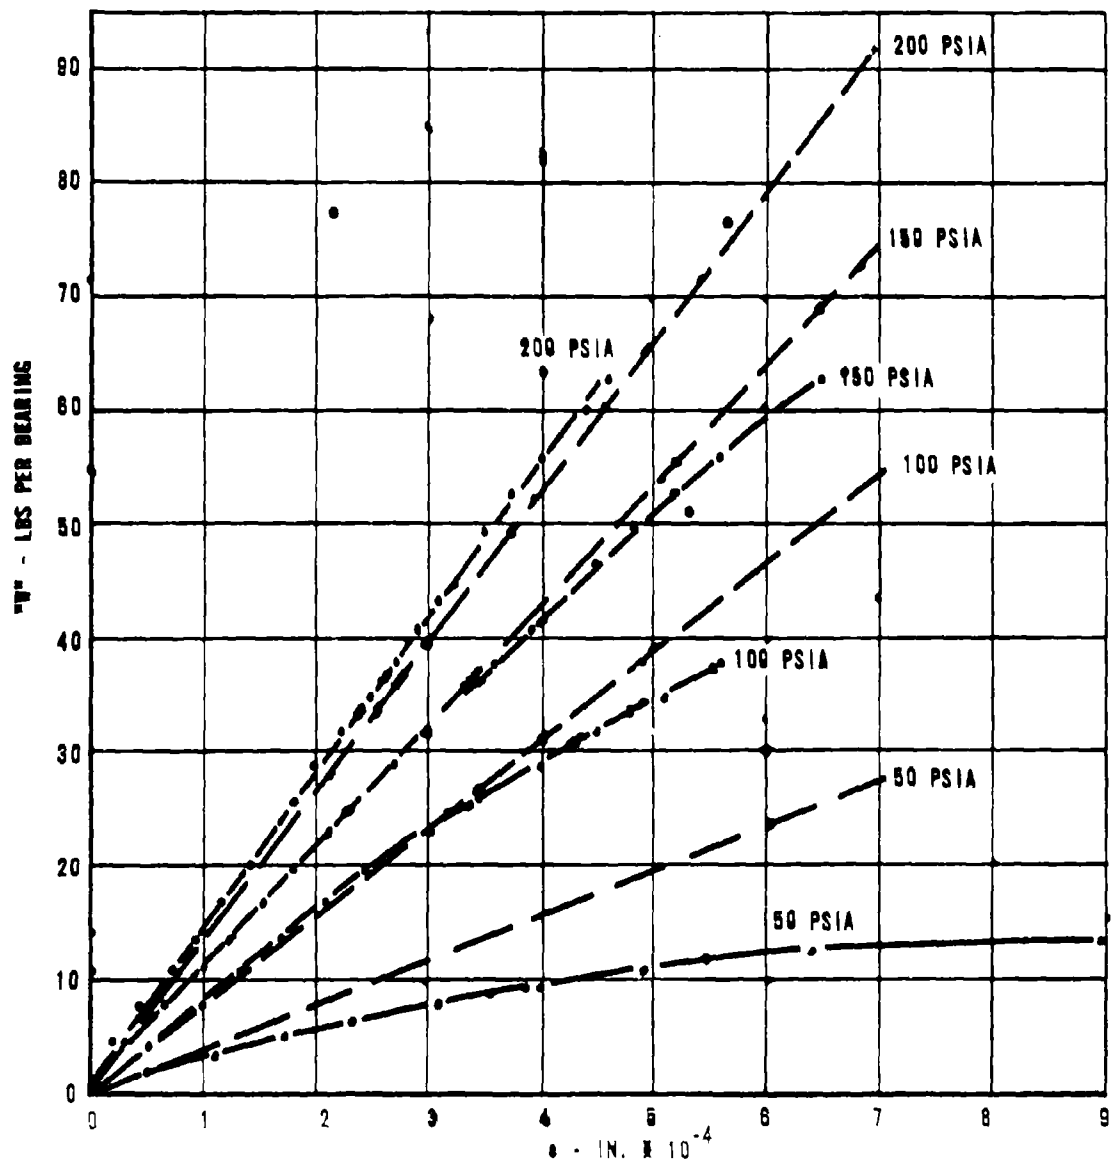


FIG. 17



# LOAD VS. ECCENTRICITY

$L/D = .5$   
 $D = 2.0"$   
 $C = .001"$   
 $a = .015"$

——— TEST  
 - - - - THEORY

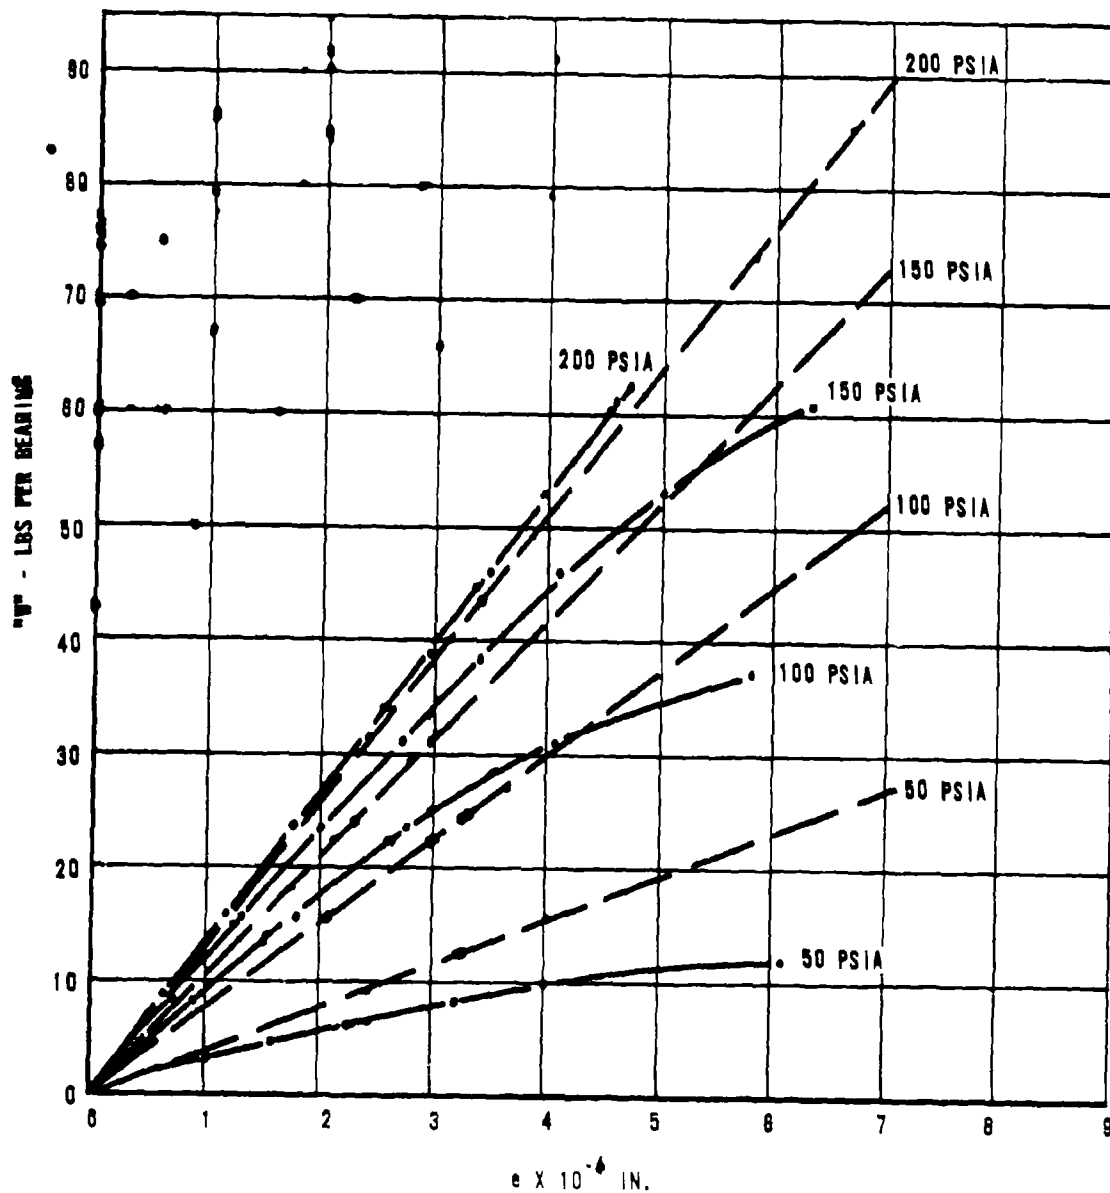


FIG. 18

# LOAD VS. ECCENTRICITY

L/D = .5  
 C = 2.0"  
 e = .0015"  
 s = .005"

— TEST  
 - - - THEORY

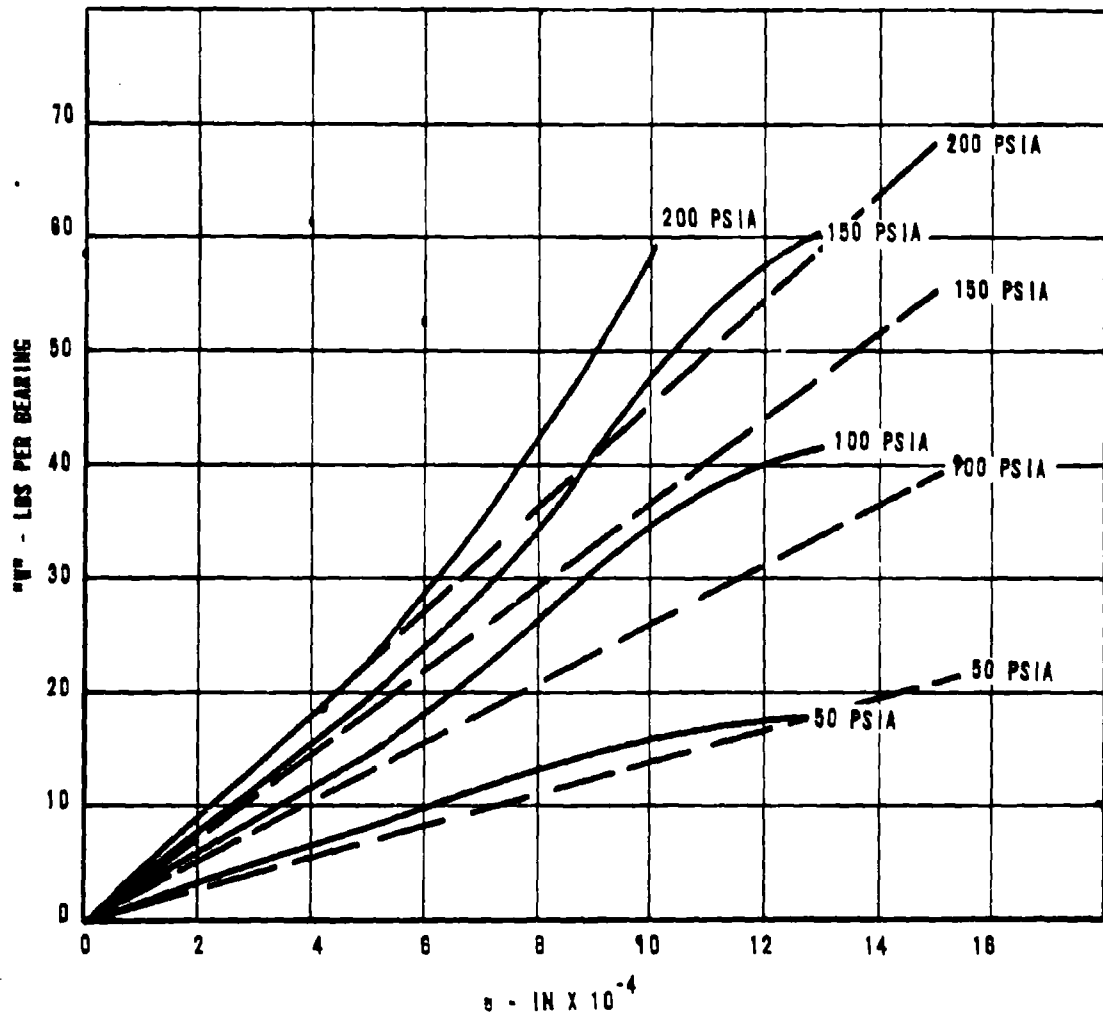


FIG. 19

# LOAD VS. ECCENTRICITY

$L/D = .5$   
 $c = 2.0$   
 $\phi = .0015$   
 $\phi = .010$

——— TEST  
 - - - THEORY


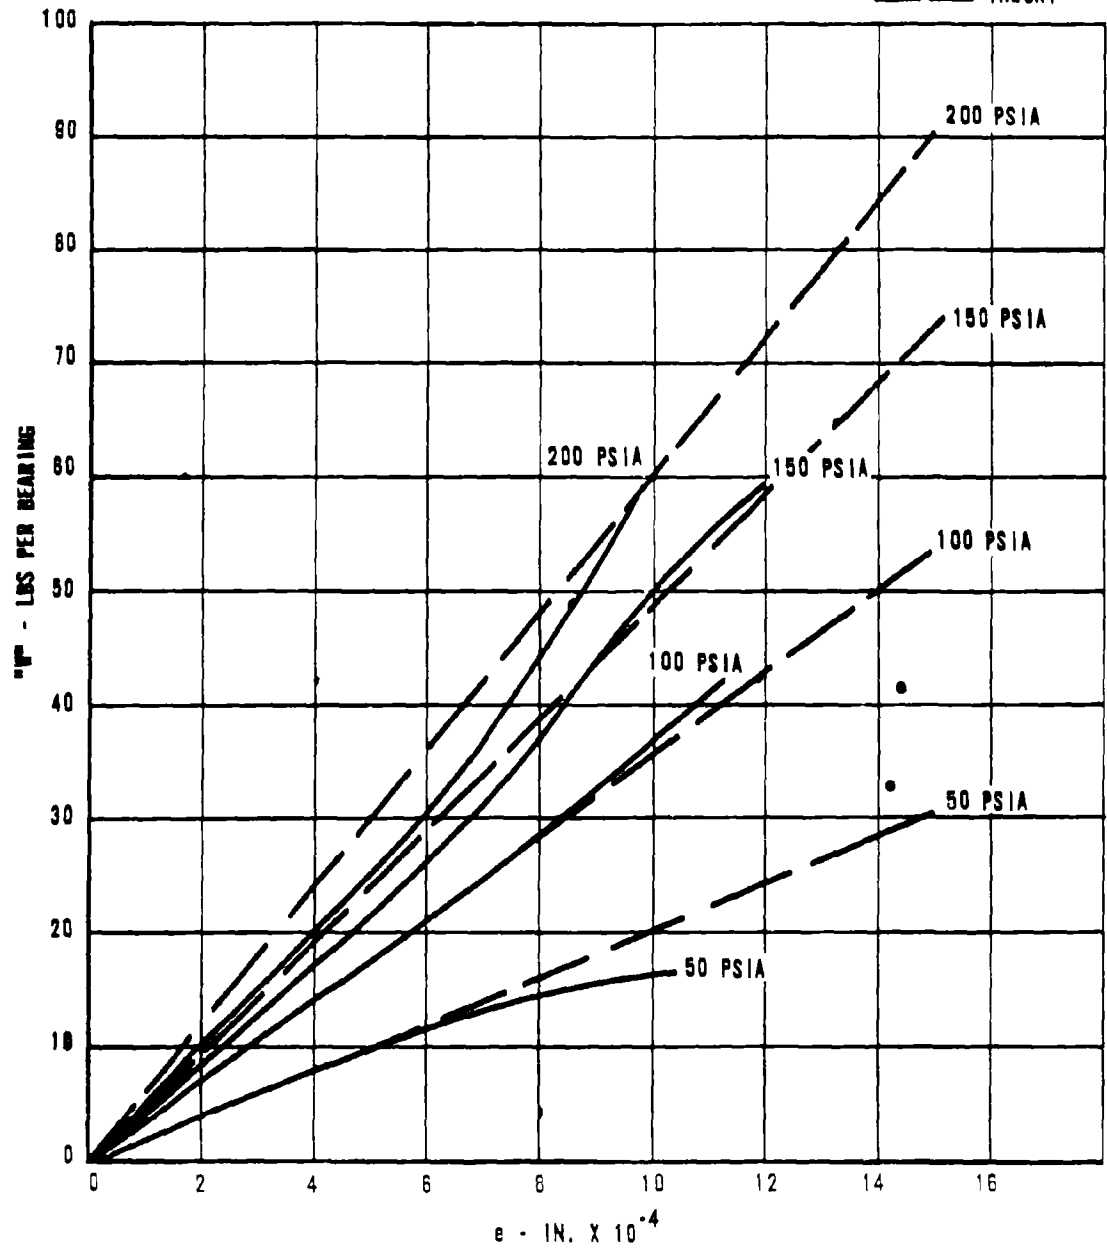


FIG. 20

# LOAD VS. ECCENTRICITY

$L/D = .5$   
 $D = 2.0"$   
 $C = .0015"$   
 $a = .015"$

——— TEST  
 - - - - THEORY

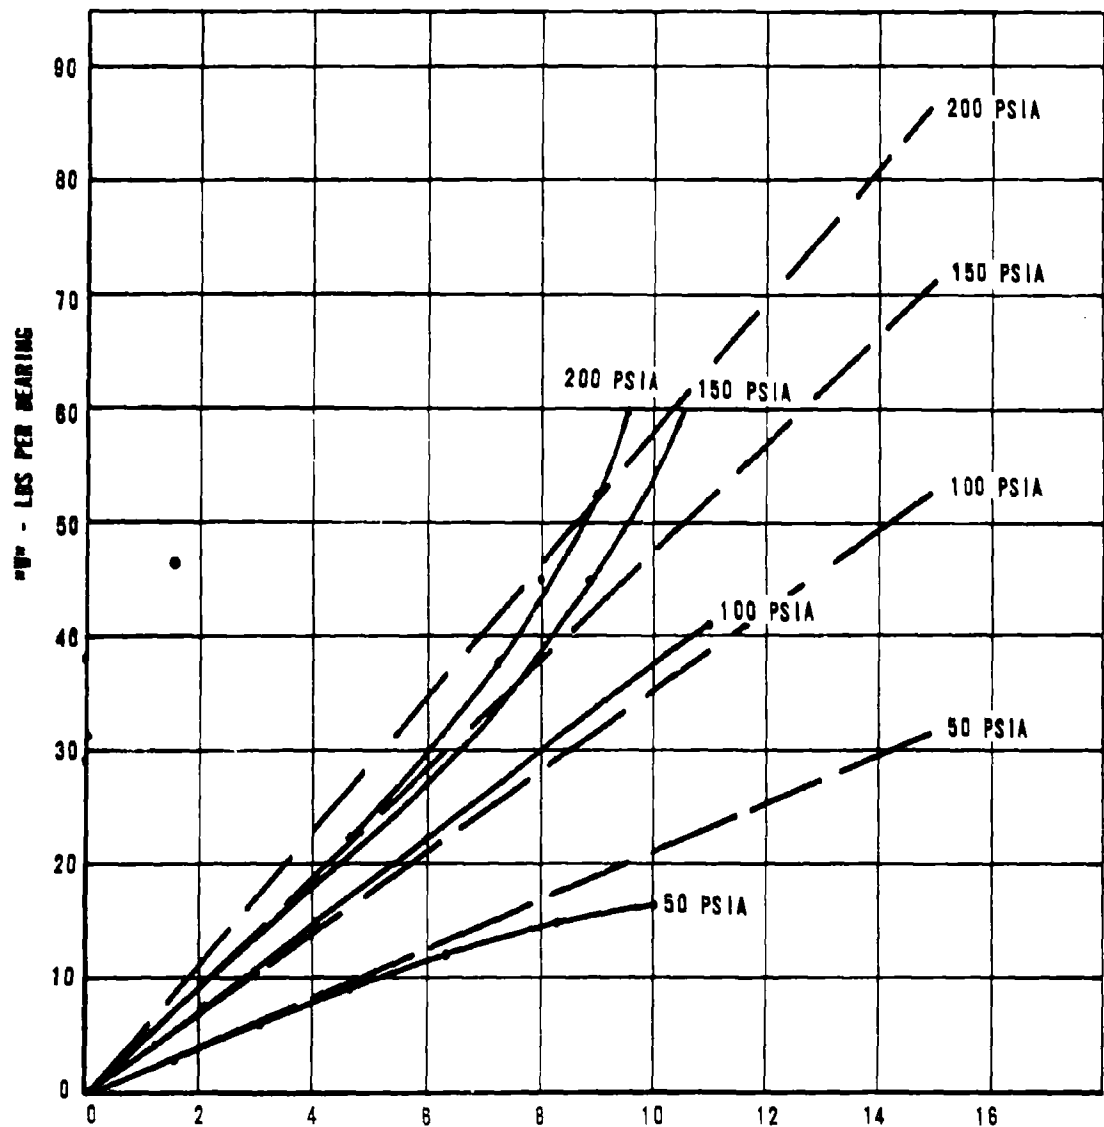

e - IN. X 10<sup>-4</sup>  
 FIG. 21

**FLOW VS. SUPPLY PRESSURE**  
(Effects of orifice size)

L/D = .5  
D = 2.0"  
C = .0005"  
△-a = .0055"  
.-a = .010"  
○-a = .015"  
W = 0 LBS.

— TEST  
--- THEORY

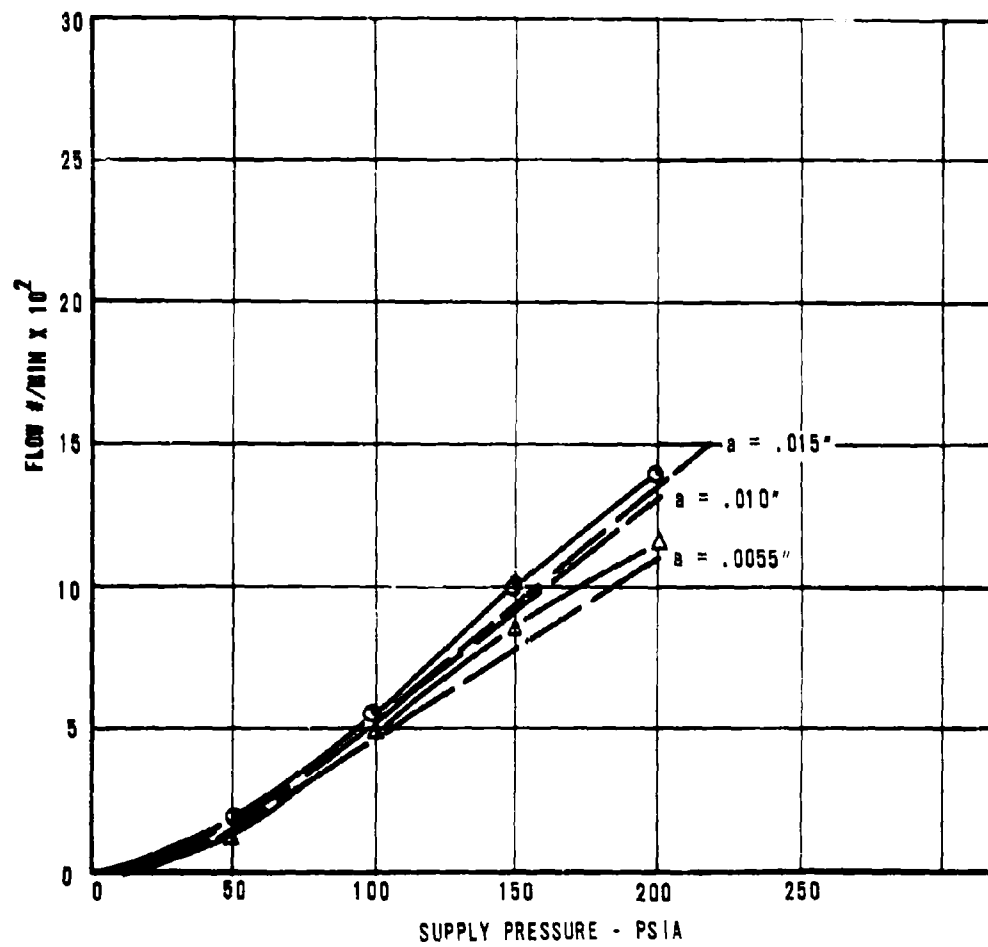


FIG. 22

# FLOW VS. SUPPLY PRESSURE (Effects of orifice size)

L/D = .5  
D = 2.00"  
Δ-a = .0055"  
-a = .010"  
○-a = .015"  
C = .001"  
W = 0 LBS.

— TEST  
-- THEORY

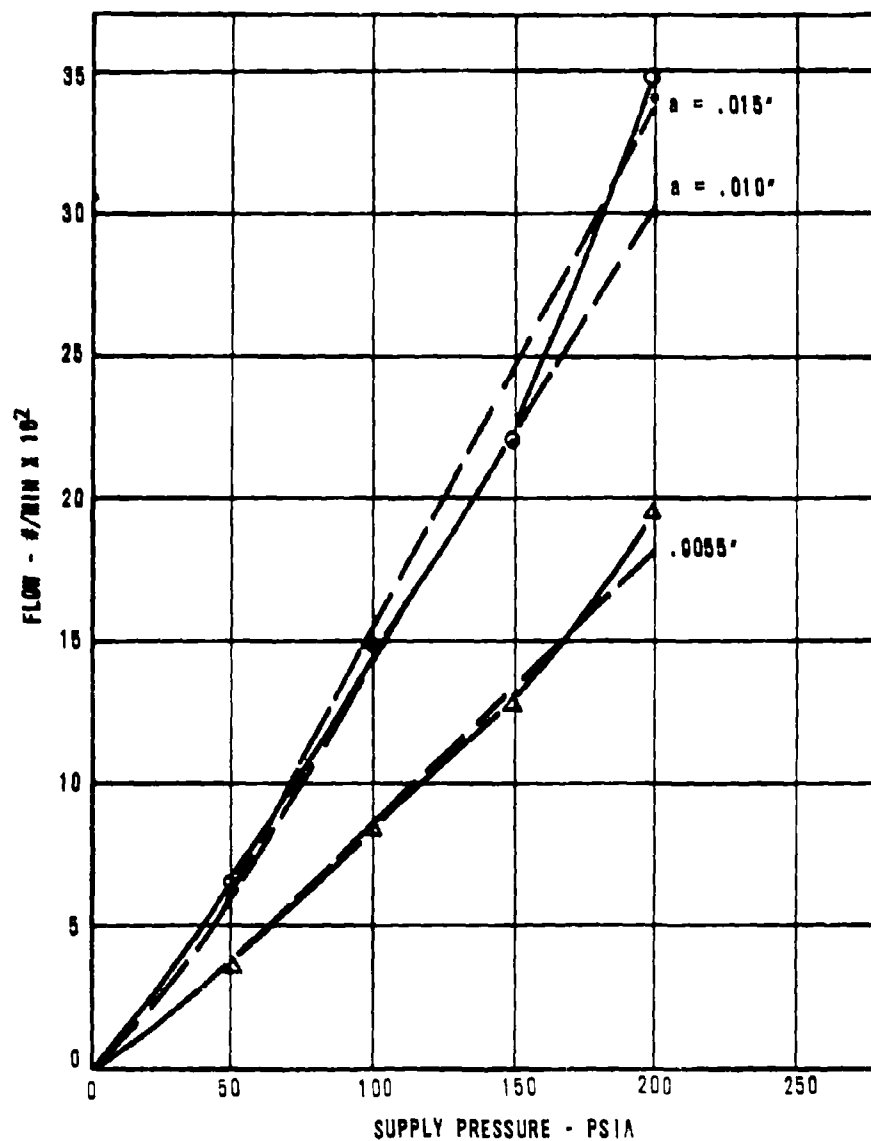


FIG. 23

FLOW VS. SUPPLY PRESSURE  
(Effects of orifice size)

L/D = .5  
D = 2.0"  
Δ-a = .0055"  
○-a = .010"  
○-a = .015"  
C = .0015"  
W = 0 LBS.

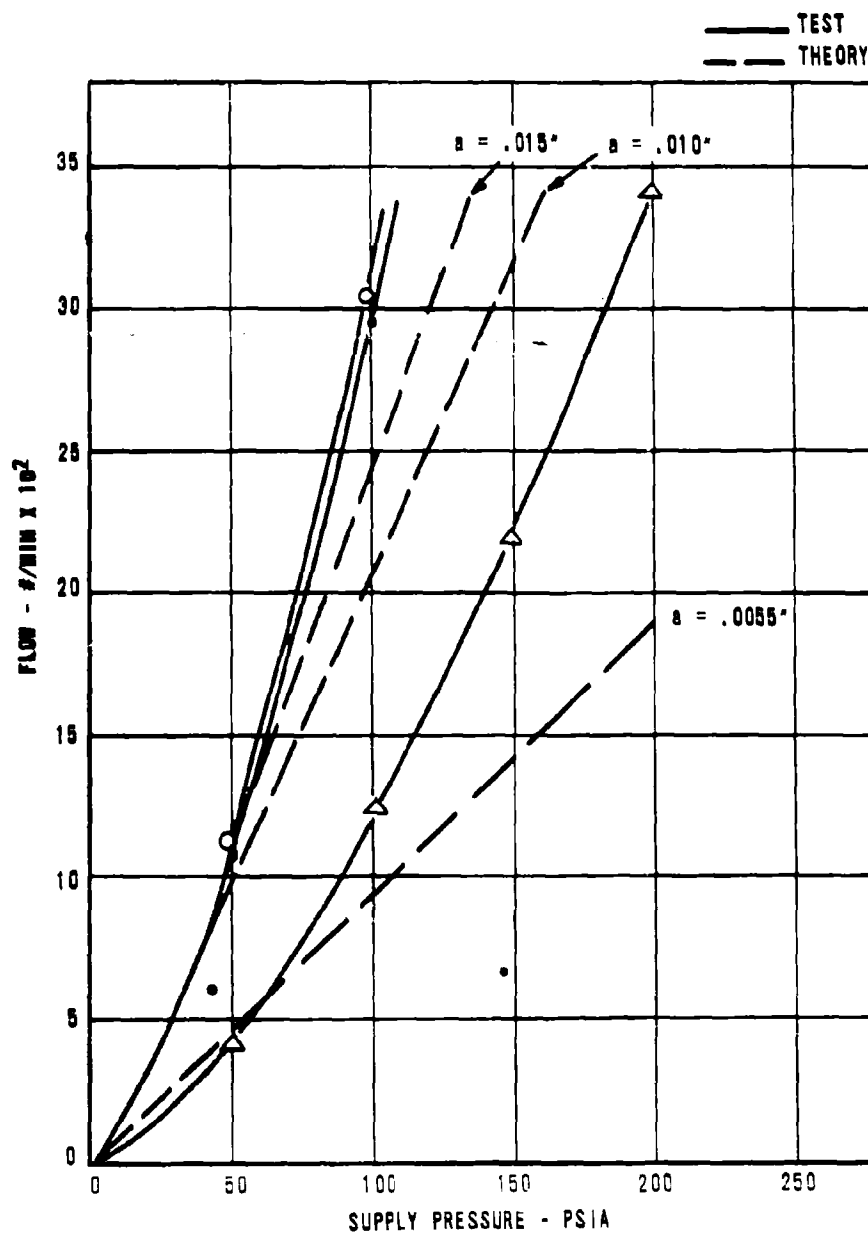


FIG. 24

# EFFECTS OF SPEED ON FLOW

$L/D = .5$   
 $D = 2.0"$   
 $C = .001"$   
 $W = 6.57 \text{ LBS.}$   
 $\Delta - a = .0055"$   
 $\cdot - a = .010"$   
 $\circ - a = .015"$

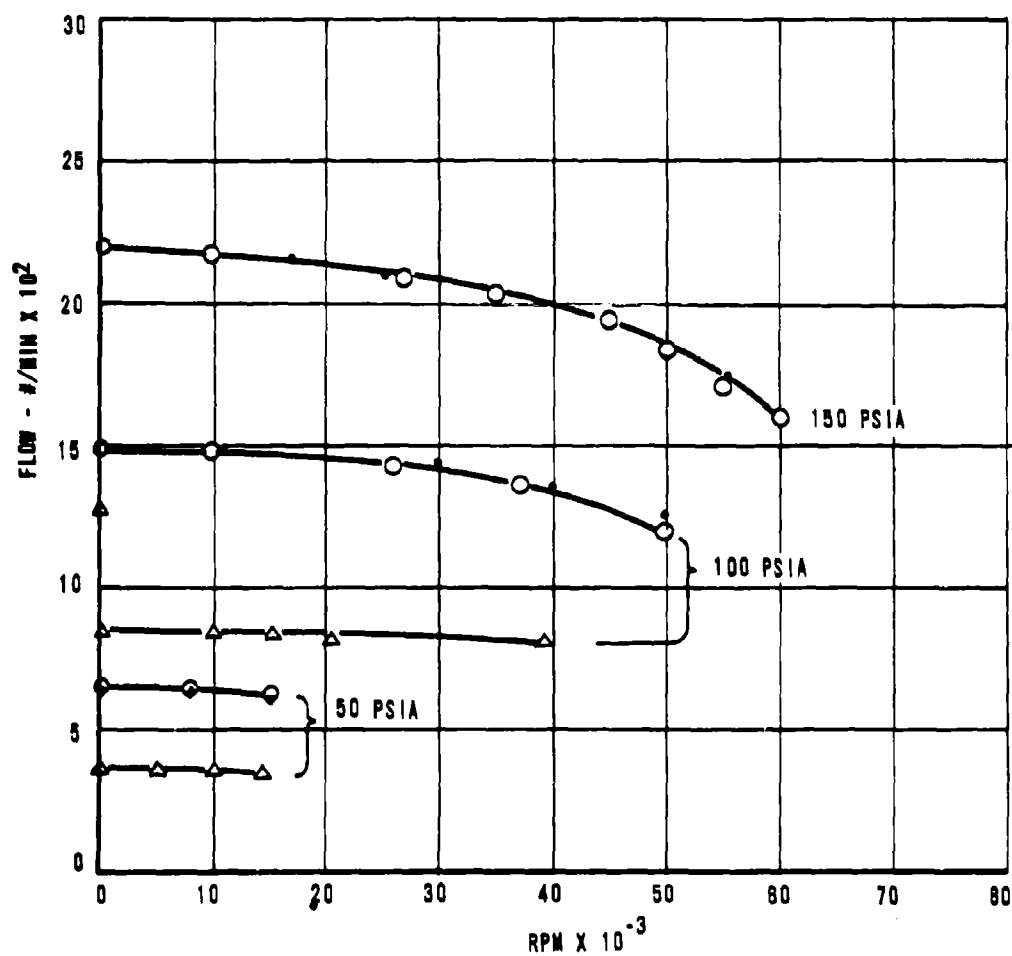


FIG. 25



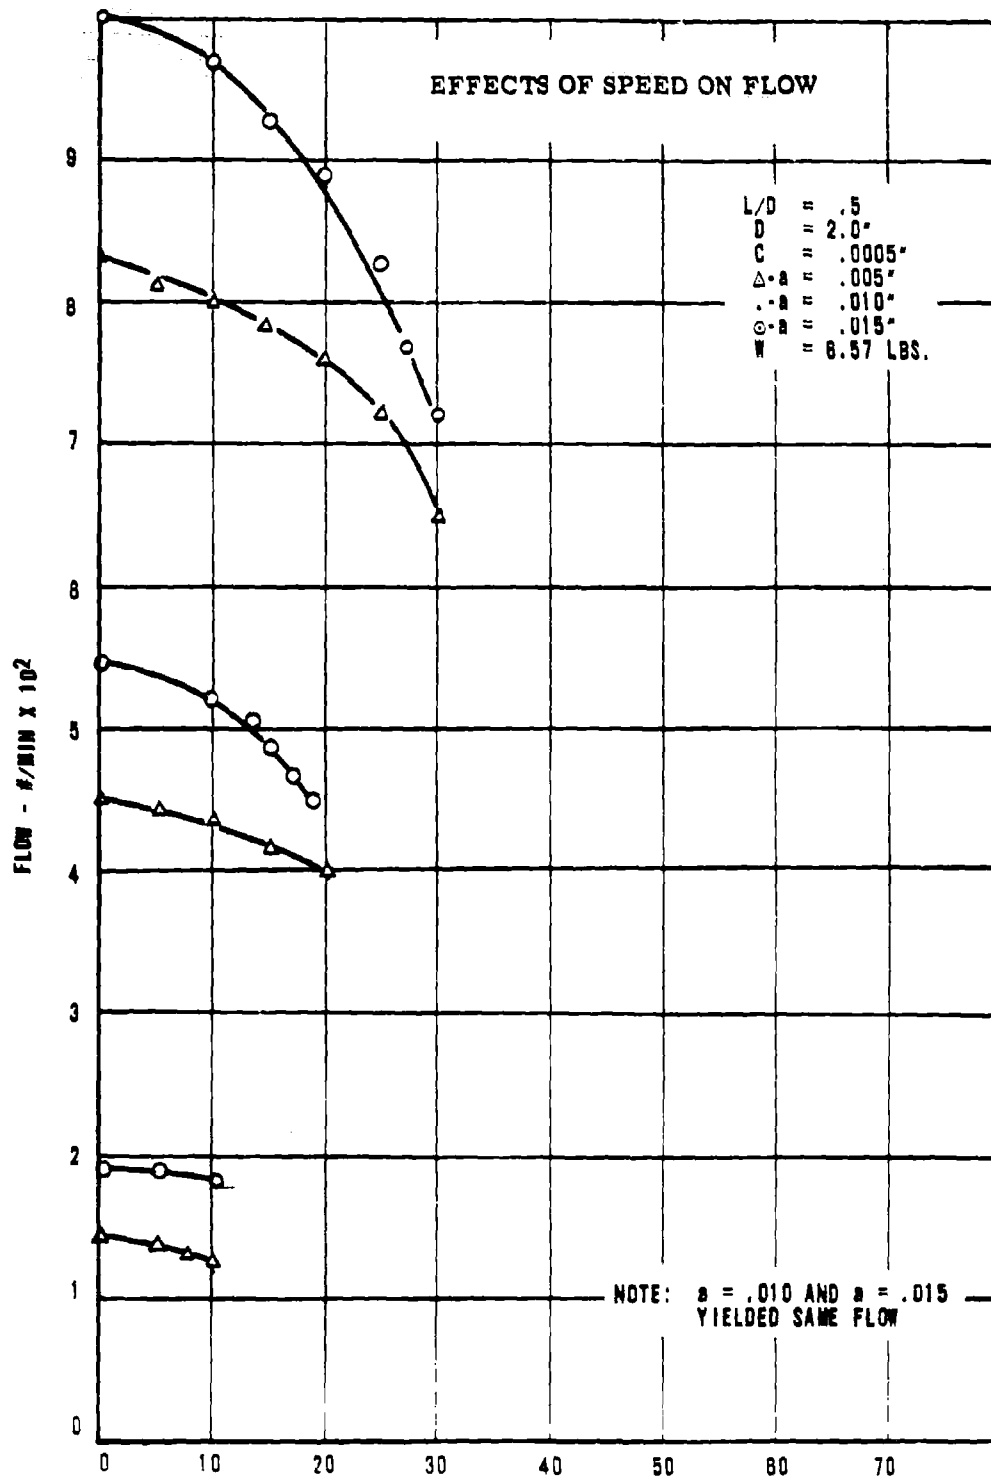


FIG. 26

**APPROVED DISTRIBUTION LISTS FOR UNCLASSIFIED TECHNICAL REPORTS  
ISSUED UNDER  
GAS LUBRICATED BEARINGS CONTRACTS**

Contract NONR 2844(00) NR 097-348

Chief of Naval Research Department of the Navy Washington 25, D.C. Attn: Code 438	10	Chief, Bureau of Ships Department of the Navy Washington 25, D.C. Attn: James C. Reid (Code 644B)	8
461	1	Material Laboratory Library	
423	1	Building 291, Code 912B	
429	1	New York Naval Shipyard	
463	1	Brooklyn 1, New York	1
466	1		
Commanding Officer Office of Naval Research Branch Office 346 Broadway New York 13, New York	1	Director Naval Research Laboratory Washington 25, D.C. Attn: Code 5230 2000	1 6
Commanding Officer Office of Naval Research Branch Office 1030 East Green Street Pasadena 1, California	1	Director U.S. Naval Engrg. Experiment Station Annapolis, Maryland Attn: Supervisor, Bearings Project, Code 790	2
Commanding Officer Office of Naval Research Branch Office Tenth Floor The John Crerar Library Bldg. 86 East Randolph Street Chicago, Illinois	1	Commanding Officer U.S. Naval Boiler and Turbine Lab. Naval Base Philadelphia, Pennsylvania	1
Commanding Officer Office of Naval Research Branch Office Navy No. 100 Fleet Post Office New York, New York	10	Commanding Officer U.S. Naval Avionics Facility Indianapolis 18, Indiana Attn: J. G. Weir	1
Office of Naval Research Resident Representative University of Pennsylvania Room 213, Hare Building Philadelphia 4, Pennsylvania	1	Superintendent U.S. Naval Postgraduate School Monterey, California	1
Director Naval Training Device Center Sands Point, Port Washington Long Island, New York	1	Commanding General U.S. Army Engineer R and D Labs. Fort Belvoir, Virginia Attn: W.M. Crim, Nuclear Power Field Office Technical Intelligence Br.	2 1
		Office of Chief of Ordnance Research and Development Division Department of the Army Washington 25, D.C. Attn: Normal L. Kleir	2

Chief, Bureau of Naval Weapons  
Department of the Navy  
Attn: G. D. Norman (RAAE-343) 3  
L. Schlesinger (RREN-4) 3

Chief of Research and Development  
Office, Chief of Staff  
Department of the Army  
Pentagon Building  
Washington 25, D. C. 1

Commanding Officer  
U.S. Army Research Office  
(DURHAM)  
Box CM, Duke Station  
Durham, North Carolina 1

Commanding Officer  
Detroit Arsenal  
Centerline, Michigan  
Attn: ORD MX-ECPD 1

Commander  
Army Rocket and Guided Missile  
Agency  
Redstone Arsenal, Alabama  
Attn: Technical Library,  
ORDXR-OTL 1

Committee on Equipment and  
Supplies  
Office of the Assistant Secretary  
of Defense (R and D)  
The Pentagon  
Washington 25, D. C. 1

Armed Services Technical  
Information Agency  
Arlington Hall Station  
Arlington 12, Virginia  
Attn: TIPCR 10

Commander  
Aeronautical Systems Division  
of the Air Force Systems Command  
Wright Patterson AF Base, Ohio  
Attn: WWRMFP-1, W. H. Biedenbender 1  
WWRMPF-2, G. A. Beane 1  
WWRMDD, P. C. Hanlon 1  
ASRCEF-2, J. L. Morris 2

Headquarters  
Wright Air Development Division  
Air Research and Development Command  
United States Air Force  
Wright-Patterson AF Base, Ohio  
Attn: WWRNGC-k, Phil Eignor 1

Commander  
Air Force Office of Scientific  
Research  
Washington 25, D. C.  
Attn: Joseph E. Long (SRDA) 3

Director  
National Aeronautics and Space  
Administration  
1512 H Street, N. W.  
Washington 25, D. C.  
Attn: Harold Hessing 2

Chief of Staff, U. S. Air Force  
The Pentagon  
Washington 25, D. C.  
Attn: DCS/D AFDRD/AD-2 1  
DCS/D AFOP-OO 1

Commander  
Air Research and Development Command  
Andrews Air Force Base  
Washington 25, D. C.  
Attn: Lt. Col. C. D. Reifstach, RADTAP 1

Army Reactors Branch  
Reactor Development Division  
U.S. Atomic Energy Commission  
Washington 25, D. C.  
Attn: Mr. Clarence Miller 2

Technical Library  
U.S. Atomic Energy Commission  
Washington 25, D. C.  
Attn: John L. Cook 3

Office of Maritime Reactors  
Division of Reactor Development  
Atomic Energy Commission  
Washington 25, D. C.  
Attn: Mr. S. Shiozawa 1

Chief, Division of Engineering  
Maritime Administration  
GAO Building  
Washington 25, D. C.

General Engineering Laboratory  
General Electric Company  
One River Road  
Schenectady 5, New York  
Attn: Dr. G.M. Rentzepis 1

General Motors Corporation  
Research Laboratories Division  
Technical Center  
Detroit 2, Michigan  
Attn: Mr. Robert Davies  
Asst. Supr of Bearings  
Section 1

Grumman Aircraft Engineering Corp.  
Bethpage, Long Island, New York  
Attn: Mr. John Karanik, Chief  
Systems Design Department 1

Illinois Institute of Technology  
Chicago 16, Illinois  
Attn: Prof. L.N. Tao 1

International Business Machine Corp.  
Research Laboratory  
San Jose, California  
Attn: Dr. W.A. Gross 5

Franklin Institute  
Laboratory for Research and Development  
Philadelphia, Pennsylvania  
Attn: Professor D.D. Fuller 5

International Telephone and  
Telegraph Laboratories  
15151 Bledsoe Street  
San Fernando, California  
Attn: Mr. G.B. Speen 1

Institute of Aeronautical Sciences  
2 East 64th Street  
New York, New York 1

Jack and Heintz, Inc.  
207 East Laboratory, Public Roads Bldg.  
Washington National Airport  
Washington 1, D.C. 1

Kearfott Company  
1378 Main Street  
Clifton, New Jersey  
Attn: Mr. Walter Carow 1

Koppers Company, Inc.  
Metals Products Division  
P.O. Box 626  
Baltimore, Maryland  
Attn: Mr. I.C. Kuchler 1

Lear, Incorporated  
Grand Rapids Division  
110 Ionia Avenue, N.W.  
Grand Rapids 2, Michigan 1

Lear, Incorporated  
3171 South Bundy Drive  
Santa Monica, California  
Attn: Richard M. Mock, President 1

Litton Industries  
336 North Foothill Road  
Beverly Hills, California  
Attn: Mr. D. Moors, Dept. 21 1

Lockheed Aircraft Corporation  
Missiles and Space Division  
P.O. Box 504  
Sunnyvale, California  
Attn: Dr. M.A. Steinberg, 53-30  
Building 202, Plant 2, PA 1

Lycoming Division  
Avco Manufacturing Corp.  
Main Street  
Stratford, Connecticut  
Attn: Mr. S.B. Withington  
President and General Manager 1

McDonnell Aircraft Corporation  
Lambert St. - St. Louis Municipal  
Airport  
Box 516  
St. Louis 3, Missouri  
Attn: Mr. Kendall Perkins  
Vice President (Engr.) 1

Marquardt Aircraft Company  
P.O. Box 2013-South Annex  
Van Nuys, California  
Attn: Mr. A.J. Kreiner, Director  
Controls and Accessories Div. 1

Massachusetts Institute of Technology  
Room 35-132  
Cambridge 39, Massachusetts  
Attn: Prof. Milton C. Shaw  
Depart. of Mechanical Engrg.

Propulsion Laboratory  
California Institute of Technology  
4800 Oak Grove Avenue  
Pasadena, California  
Attn: Engineering Library 1  
Dr. John H. Laub

Chief, Technical Information  
Service Extension

P. O. Box 62

Oak Ridge, Tennessee

Attn: Melvin S. Day 1/repro

Head, Experimental Engineering,  
R. P. D.

Oak Ridge National Laboratory

Building 9201-3

Oak Ridge, Tennessee

Attn: H. W. Savage 1

Commanding Officer

Diamond Ordnance Fuse Laboratories

Washington 25, D. C.

Attn: Technical Reference Section  
(ORDTL 06.33) 1

Office, Chief of Engineers

Engineer R and D Division

Gravelly Point

Washington 25, D. C. 1

SP 23-Guidance

U. S. Navy

Washington, D. C.

Attn: D. Gold 2

Office of Technical Services

Department of Commerce

Washington 25, D. C. 1

A. C. Spark Plug Division

General Motors Corporation

Milwaukee 1, Wisconsin

Attn: Allen Knudsen 1

A. C. Spark Plug Division

General Motors Corporation

Route 128

Wakefield, Massachusetts

Attn: W. H. St. Laurent 1

Aerojet-General Corporation

Nucleonics

San Ramon, California 1

Air Research Manufacturing Division  
The Garrett Corporation  
9851 S. Sepulveda Boulevard  
Los Angeles, California  
Attn: Jerry Glaser, Supervisor  
Mechanical Lab. Dept. 93-17 1

Allis Chalmers Manufacturing Co.  
Buda Division

1126 South 70th Street

Milwaukee 1, Wisconsin

Attn: Mr. Will Mitchell, Jr.

Acting Director of Research  
Research Division 1

American Society of Lubrication Engrs.

5 North Wabash Avenue

Chicago 2, Illinois 1

Chairman, Research Committee on  
Lubrication

American Society of Mechanical Engrs

29 West 39th Street

New York 18, N. Y. 1

Analogue Controls, Inc.

200 Frank Road

Hicksville, L. I., New York

Attn: Mr. J. L. Charubim

Chief Engineer 1

Applied Physics Laboratory

Johns Hopkins University

Silver Spring, Maryland

Attn: George L. Seielstad,

Supr. Tech. Reports Group 1

Autonetics

A Division of N. American Aviation

9150 East Imperial Highway

Downey, California 1

The Barden Corporation

Danbury, Connecticut

Attn: B. L. Mims, Vice President 1

Battelle Memorial Institute

505 King Avenue

Columbus 1, Ohio

Attn: Dr. Russell Dayton 1

Beemer Engineering Company

401 North Broad Street

Philadelphia 8, Pa. 1

Malco Electronics, Inc.  
21 North Third Street  
Minneapolis 1, Minnesota  
Attn: Mr. G. E. Adams  
Automatic Controls Dept. 1

Massachusetts Institute of Technology  
Department of Aeronautical Engineering  
Instrumentation Laboratory  
Cambridge 39, Massachusetts 2

Dynamic Analysis and Control Lab.  
Massachusetts Institute of Technology  
Cambridge 39, Massachusetts  
Attn: Dr. R. W. Mann 1

Aeronautical Engineering Labs.  
University of Michigan  
Ann Arbor, Michigan  
Attn: Prof. R. B. Morrison 1

Minneapolis-Honeywell Regulator Co.  
Gyro Section  
2600 Ridgeway Road  
Minneapolis, Minnesota  
Attn: Mr. Jack W. Lower  
Chief, Aeronautical Div. 1

Cryogenic Engineering Laboratory  
National Bureau of Standards  
Boulder, Colorado  
Attn: Mr. B. W. Birmingham 1  
Library 1

U.S. Department of Commerce  
National Bureau of Standards  
Boulder Laboratories  
Boulder, Colorado 1

New Departure  
Division of General Motors Corp.  
Bristol, Connecticut  
Attn: R. N. S. Schiedt, Manager  
Bearing Development and Contract 1

Norden Laboratories  
Norden Div. of United Aircraft Corp.  
White Plains, New York  
Attn: Miss Elizabeth Zeil, Librarian 1

Department of Chemical Engineering  
New York University  
New York 53, New York  
Attn: James J. Barker, Assoc. Prof.  
of Nuclear Engineering

New Hampshire Ball Bearings, Inc.  
Peterborough, New Hampshire  
Attn: Mr. Henry F. Villaume, Engr. 1

Northrop Corporation  
Norair Division  
1001 East Broadway  
Hawthorne, California  
Attn: Library, 3145-31 1

Nortronics  
A Division of Northrop Corporation  
100 Morse Street  
Norwood, Massachusetts  
Attn: Mr. E. L. Swainson, Tech. Asst.  
Precision Products Dept. 1

The Technological Institute  
Northwestern University  
Evanston, Illinois  
Attn: Professor A. Charnes 1

Pratt and Whitney Aircraft Div. CANEL  
P. O. Box 1102  
Middletown, Connecticut 1

Radio Corporation of America  
Camden, New Jersey 1

Ryan Aeronautical Company  
Lindberg Field  
San Diego 12, California  
Attn: Mr. Frank W. Fink  
Vice Pres. and Chief Engr. 1

Sanderson and Porter  
72 Wall Street  
New York 5, New York  
Attn: Mr. S. T. Robinson

Solar Aircraft Company  
2200 Pacific Highway  
San Diego 12, California  
Attn: Paul A. Pitt, Chief Engineer 1

Space Technology Laboratories, Inc.  
P. O. Box 95001  
Los Angeles 45, California  
Attn: Mr. Kenton Andrews  
Bldg. "F", Room 125 1

Sperry Gyroscope Company  
Div. Of Sperry Rand Co.  
Great Neck, L. I., New York  
Attn: Mr. Wilmer L. Borrow  
Vice President for R and D

Utica Division  
Bendix Aviation Corporation  
Utica, New York  
Attn: Mr. Russell T. DeMuth,  
Senior Engr. 1

Bendix Aviation Corporation  
Research Laboratories Division  
Southfield, Michigan  
Attn: Mr. Ralph H. Larson 1

Boeing Airplane Company  
Research Group  
Box 3707  
Seattle 25, Washington  
Attn: Mr. D. J. Melchior  
Mechanical Equipment 1

Bryant Chucking Grinder Company  
60 Clinton Avenue  
Springfield, Vermont  
Attn: Mr. Roald Cann 1

Cadillac Gage Company  
P. O. Box 3806  
Detroit 5, Michigan  
Attn: Mr. J. Taylor, Project Engr. 1

Carrier Corporation  
Division of Research  
Research Center  
Syracuse, New York  
Attn: Dr. Dewey J. Sandell 1

Chance Vought Corporation  
P. O. Box 5907  
Dallas, Texas  
Attn: Mr. R. C. Blaylock  
Vice President, (Engr) 1

Chrysler Corporation  
Defense Operations  
P. O. Box 757  
Detroit 31, Michigan  
Attn: Mr. C. W. Snider 1

The Cleveland Graphite Bronze Co.  
17000 St. Clair Avenue  
Cleveland 10, Ohio  
Attn: Mr. R. H. Josephson 1

Collins Construction Co.  
P. O. Box 86  
Port Lavaca, Texas  
Attn: Mr. James D. Mamarchev  
Consulting Engineer 1

Convair  
A Division of General Dynamics Corp.  
Fort Worth, Texas  
Attn: Mr. L. E. McTaggart, Sr. Des. Engr.  
Engrg. Annex No. 1 1

Curtiss-Wright Corp.  
Wright Aeronautical Division  
Department 8311  
Wood Ridge, New Jersey  
Attn: Mr. W. J. Derner,  
Chief Project Engr. 1

Daystrom Pacific  
9320 Lincoln Boulevard  
Los Angeles 45, California  
Attn: Robert H. Smith  
Special Project Engr. 1

Dynamic Controls Corporation  
14 Runde Lane  
Bloomfield, Connecticut  
Attn: Mr. Thomas P. Farkas 1

E. I. DuPont de Nemours and Co., Inc.  
Wilmington 98, Delaware  
Attn: Dr. McNeilly  
Mechanical Development Lab. 1

Electronics Systems Laboratory  
Federal Telecommunications Labs.  
Nutley, New Jersey  
Attn: Mr. John Metzger 1

Ford Instrument Co.  
31-10 Thomson Avenue  
Long Island City 1, New York  
Attn: Mr. Jarvis

Ford Motor Company  
Dearborn, Michigan  
Attn: Prof. Adolph Egli 1

General Atomic Division  
General Dynamics Corp.  
P. O. Box 608  
San Diego 12, California  
Attn: Mr. F. W. Simpson 1

General Engineering Laboratory  
General Electric Company  
One River Road  
Schenectady 5, New York  
Attn: Dr. Beno Sternlich

Sperry Gyroscope Company  
 1 x 115  
 Great Neck, L. I., New York  
 Attn: Mr. John W. Steves 1  
  
 Stevens Institute of Technology  
 Hoboken, New Jersey  
 Attn: Prof. P. F. Martinuzzi 1  
  
 Stratos Division  
 Fairchild Airplane and Engine Co.  
 Bay Shore, L. I., New York  
 Attn: Mr. George Mackowski 1  
  
 Sundstrand Turbo  
 2480 West 70th Avenue  
 Denver 21, Colorado 1  
  
 Thompson Ramo Wooldridge Corporation  
 P. O. Box 90534 Airport Station  
 Los Angeles 45, California  
 Attn: Mr. Robert I. King F1829 1  
  
 AiResearch Mfg. Co. of Arizona  
 P. O. Box 5217  
 Phoenix, Arizona  
 Attn: Librarian 2  
  
 Waukesha Bearings Corporation  
 P. O. Box 346  
 Waukesha, Wisconsin  
 Attn: Mr. J. M. Gruber, Ch. Engr. 1  
  
 Tribo-Netics Laboratories  
 Vermillion, Ohio  
 Attn: Mr. E. Fred Macks 1  
  
 Universal Match Company  
 Avionics Dept. Technical Library  
 4407 Cook Avenue  
 St. Louis 13, Missouri 1  
  
 USI Technical Center  
 3901 N. E. 12th Avenue  
 Pompano Beach, Florida  
 Attn: Dr. W. C. Knopf 1  
  
 School of Mechanical Engineering  
 University of Pennsylvania  
 Philadelphia 4, Pennsylvania  
 Attn: Prof. P. R. Trumpler, Director 1

Westinghouse Electric Corporation  
 Research Laboratories  
 East Pittsburgh, Pennsylvania  
 Attn: Mr. John Boyd  
  
 Westinghouse Electric Corporation  
 P. O. Box 868  
 Pittsburgh 30, Pennsylvania  
 Attn: Mr. J. K. Hardnette 1  
 Vice Pres. and General Manager  
  
 Worthington Corporation  
 Harrison, New Jersey  
 Attn: Mr. H. Walter 1  
 Director of Research  
  
 Litton Industries  
 336 North Foothill Road  
 Beverly Hills, California  
 Attn: Dr. J. S. Ausman 2